

CSC358 Intro. to Computer Networks

Lecture 6: Reliable data transfer: rdt2.2, rdt3.0, GBN, and SR

Amir H. Chinatei, Winter 2016

ahchinaei@cs.toronto.edu
http://www.cs.toronto.edu/~ahchinaei/

Many slides are (inspired/adapted) from the above source
© all material copyright; all rights reserved for the authors




Office Hours: T 17:00-18:00 R 9:00-10:00 BA4222

TA Office Hours: W 16:00-17:00 BA3201 R 10:00-11:00 BA7172

csc358ta@cdf.toronto.edu
http://www.cs.toronto.edu/~ahchinaei/teaching/2016jan/csc358/


Reliable data transfer: getting started

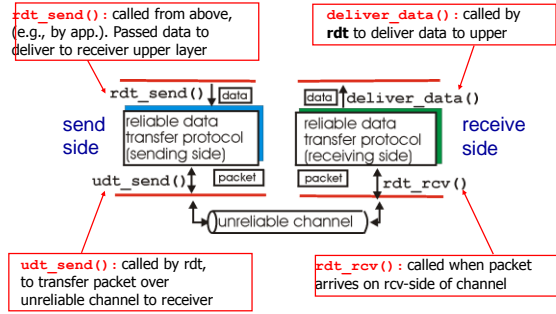

Transport Layer 3-2

rdt1.0: reliable transfer over a reliable channel

- underlying channel perfectly reliable
 - no bit errors
 - no loss of packets
- separate FSMs for sender, receiver:
 - sender sends data into underlying channel
 - receiver reads data from underlying channel




Transport Layer 3-3

rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
 - checksum to detect bit errors
- the question: how to recover from errors:
 - acknowledgements (ACKs):** receiver explicitly tells sender that pkt received OK
 - negative acknowledgements (NAKs):** receiver explicitly tells sender that pkt had errors
 - sender retransmits pkt on receipt of NAK
- new mechanisms in `rdt2.0` (beyond `rdt1.0`):
 - error detection
 - feedback: control msgs (ACK, NAK) from receiver to sender


Transport Layer 3-4

rdt2.0: FSM specification

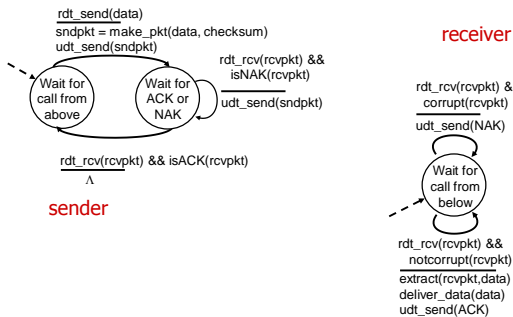


Transport Layer 3-5

rdt2.0: operation with no errors

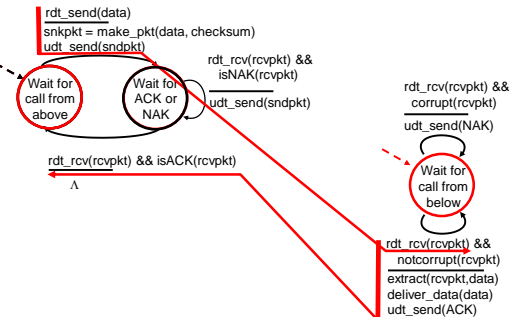

Transport Layer 3-6

rdt3.0: stop-and-wait operation

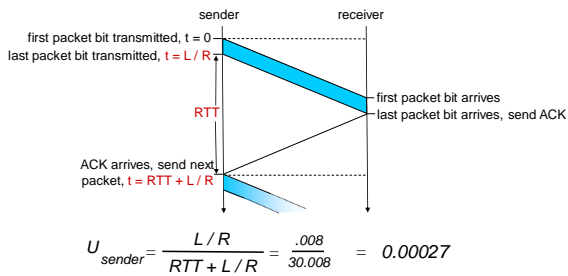


Transport Layer 3-19

Pipelined protocols

pipelining: sender allows multiple, “in-flight”, yet-to-be-acknowledged pkts


- range of sequence numbers must be increased
- buffering at sender and/or receiver

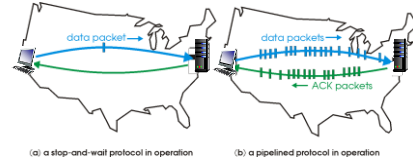

❖ two generic forms of pipelined protocols: **go-Back-N**, **selective repeat**

Transport Layer 3-20

Pipelining: increased utilization

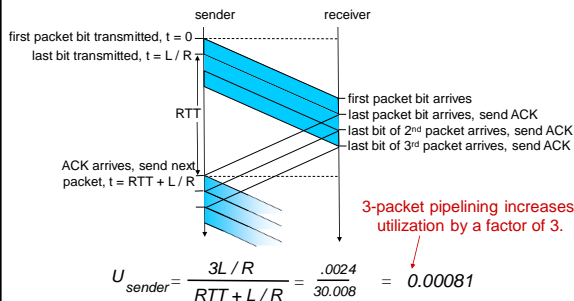

Transport Layer 3-21

Pipelined protocols: overview

Go-back-N:

- sender can have up to N unacked packets in pipeline
- receiver only sends **cumulative ack**
 - doesn't ack packet if there's a gap
- sender has timer for oldest unacked packet
 - when timer expires, retransmit *all* unacked packets

Selective Repeat:

- sender can have up to N unack'ed packets in pipeline
- rcvr sends **individual ack** for each packet
- sender maintains timer for each unacked packet
 - when timer expires, retransmit only that unacked packet

Transport Layer 3-22

Go-Back-N: sender


- k-bit seq # in pkt header
- “window” of up to N, consecutive unack'ed pkts allowed



- ACK(n): ACKs all pkts up to, including seq # n - “**cumulative ACK**”
 - may receive duplicate ACKs (see receiver)
- timer for oldest in-flight pkt
- timeout(n): retransmit packet n and all higher seq # pkts in window


Transport Layer 3-23

GBN: sender extended FSM

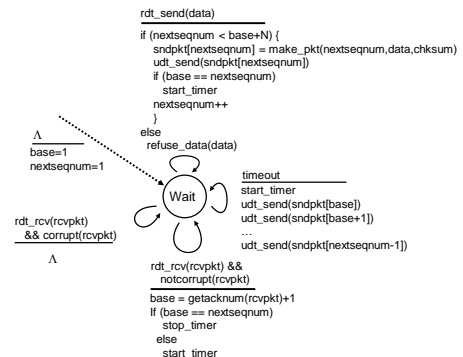

Transport Layer 3-24

GBN: receiver extended FSM




ACK-only: always send ACK for correctly-received pkt with highest *in-order* seq #

- may generate duplicate ACKs
- need only remember **expectedseqnum**
- out-of-order pkt:
 - discard (don't buffer): **no receiver buffering!**
 - re-ACK pkt with highest in-order seq #

Transport Layer 3-25

GBN in action

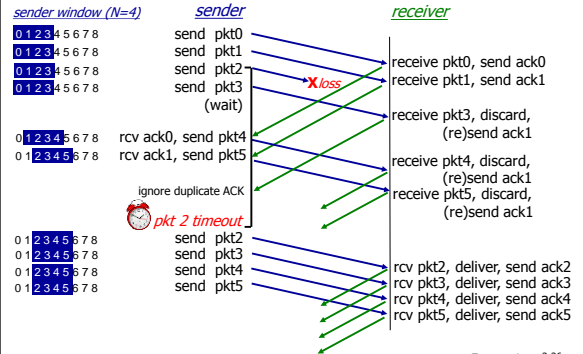


Transport Layer 3-26

Selective repeat

- receiver *individually* acknowledges all correctly received pkts
 - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
 - sender timer for each unACKed pkt
- sender window
 - N consecutive seq #'s
 - limits seq #'s of sent, unACKed pkts

Transport Layer 3-27

Selective repeat: sender, receiver windows

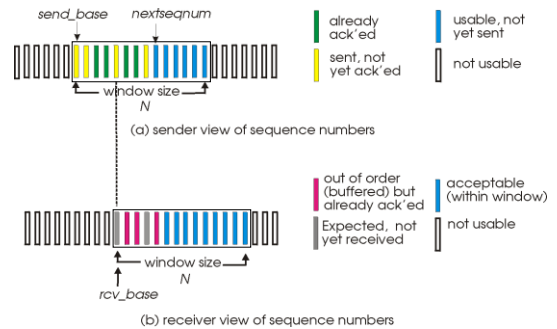


Transport Layer 3-28

Selective repeat

- | sender | receiver |
|--|---|
| data from above: | pkt n in [rcvbase, rcvbase+N-1] |
| ❖ if next available seq # in window, send pkt | ❖ send ACK(n) |
| timeout(n): | ❖ out-of-order: buffer |
| ❖ resend pkt n, restart timer | ❖ in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt |
| ACK(n) in [sendbase, sendbase+N]: | pkt n in [rcvbase-N, rcvbase-1] |
| ❖ mark pkt n as received | ❖ ACK(n) |
| ❖ if n smallest unACKed pkt, advance window base to next unACKed seq # | otherwise: |
| | ❖ ignore |

Transport Layer 3-29

Selective repeat in action

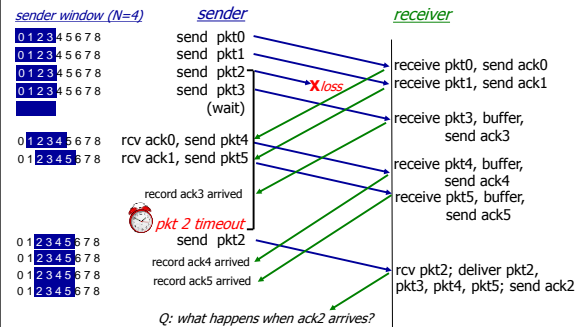

Q: what happens when ack2 arrives?


Transport Layer 3-30

Selective repeat: dilemma

example:

- ❖ seq #'s: 0, 1, 2, 3
- ❖ window size=3
- ❖ receiver sees no difference in two scenarios!
- ❖ duplicate data accepted as new in (b)

Q: what relationship between seq # size and window size to avoid problem in (b)?

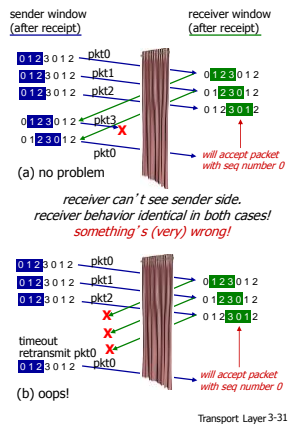

Next

- ❖ Midterm on Chapters 1 and 2
- ❖ TCP
- ❖ Congestion control