


Information Systems Analysis and Design cac340

## XV. The Entity-Relationship Model

**The Entity-Relationship Model**  
**Entities, Relationships and Attributes**  
**Cardinalities, Identifiers and Generalization**  
**Documentation of E-R Diagrams and Business Rules**




©2001 John Mylopoulos The Entity-Relationship Model -- 1

Information Systems Analysis and Design cac340

## The Entity Relationship Model


- The **Entity-Relationship (ER) model** is a *conceptual* data model, capable of describing the data requirements for a new information system in a direct and easy to understand graphical notation.
- Data requirements are described in terms of a **conceptual (or, ER) schema**.
- ER schemata are comparable to class diagrams.



©2001 John Mylopoulos The Entity-Relationship Model -- 2

Information Systems Analysis and Design cac340

## The Constructs of the E-R Model



Construct	Graphical representation
Entity	
Relationship	
Specialization	
Composite attribute	
Cardinality of a relationship	
Cardinality of an attribute	
Partial identifier	
General identifier	
Generalization	
Subclass	

©2001 John Mylopoulos The Entity-Relationship Model -- 3

Information Systems Analysis and Design cac340


## Entities

- These represent classes of objects (facts, things, people,...) that have properties in common and an autonomous existence.
- City, Department, Employee, Purchase and Sale are examples of entities for a commercial organization.
- An instance of an entity is an object in the class represented by the entity.
- Stockholm, Helsinki, are examples of instances of the entity City, and the employees Peterson and Johanson are examples of instances of the Employee entity.
- The E-R model is very different from the relational model in which it is not possible to represent an object without knowing its properties (an employee is represented by a tuple containing the name, surname, age, and other attributes.)

©2001 John Mylopoulos The Entity-Relationship Model -- 4

Information Systems Analysis and Design cac340

## Examples of Entities









©2001 John Mylopoulos The Entity-Relationship Model -- 5


Information Systems Analysis and Design cac340

## Relationships

- They represent logical links between two or more entities.
- Residence is an example of a relationship that can exist between the entities City and Employee; Exam is an example of a relationship that can exist between the entities Student and Course.
- An instance of a relationship is an n-tuple made up of instances of entities, one for each of the entities involved.
- The pair of objects made up of the employee named Johansen and the city Stockholm, or the pair of objects made from the employee Peterson and the city Oslo, are examples of instances in the relationship Residence.

©2001 John Mylopoulos The Entity-Relationship Model -- 6

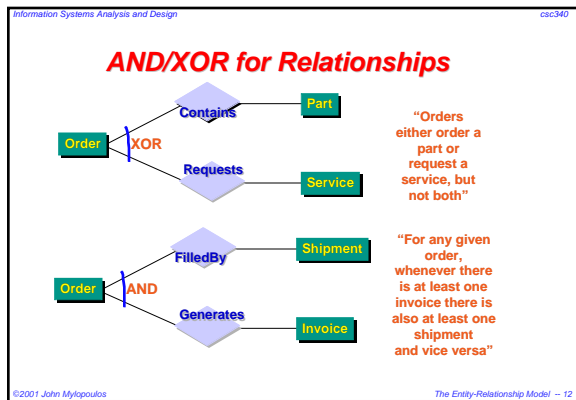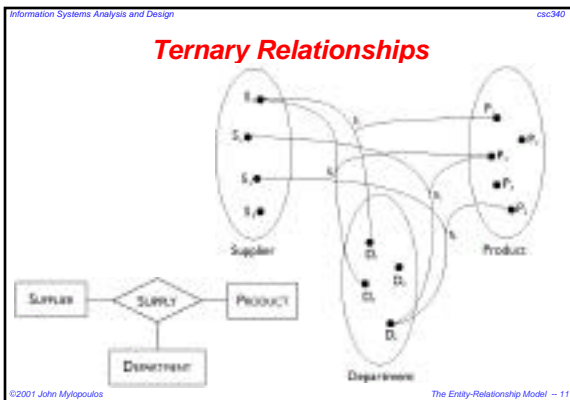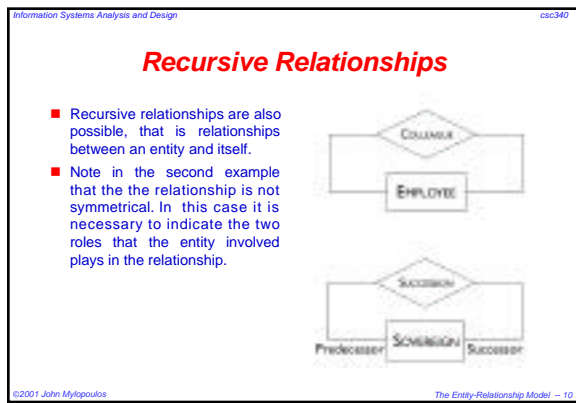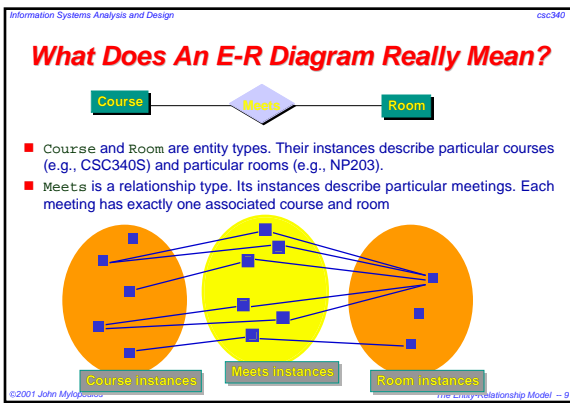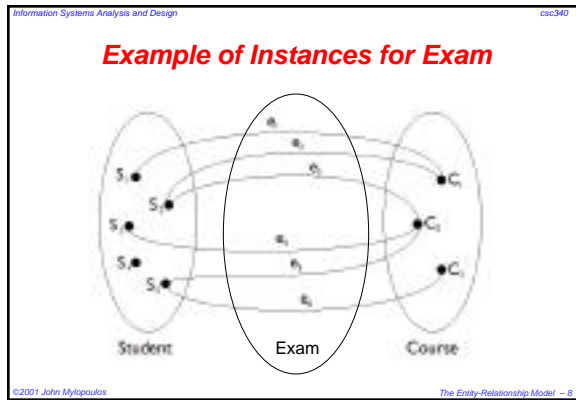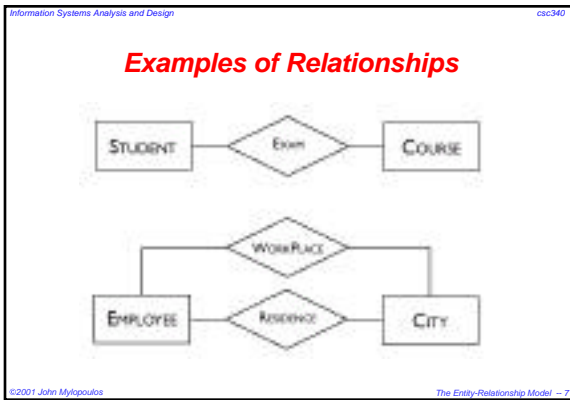

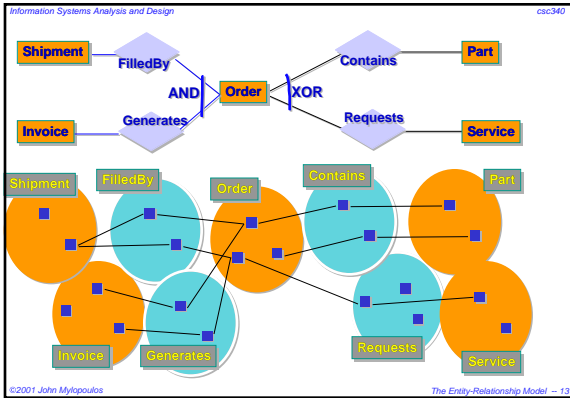


Information Systems Analysis and Design csc340

### Attributes

- These describe the elementary properties of entities or relationships.
- For example, Surname, Salary and Age are possible attributes of the Employee entity, while Date and Mark are possible attributes for the relationship Exam between Student and Course.
- An attribute associates with each instance of an entity (or relationship) a value belonging to a set known as the **domain** of the attribute.
- The domain contains the admissible values for the attribute.

©2001 John Mylopoulos The Entity-Relationship Model - 14

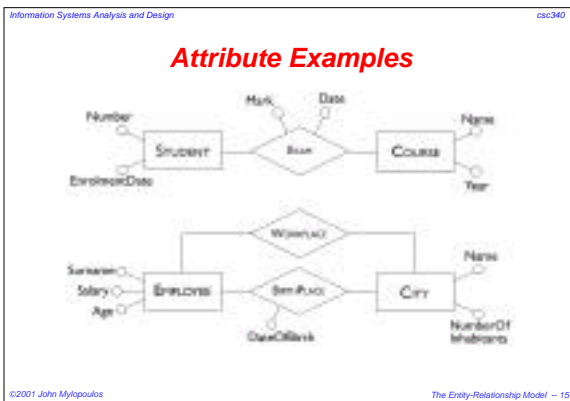


Information Systems Analysis and Design csc340

### Composite Attributes

- It is sometimes convenient to group attributes of the same entity or relationship that have closely connected meanings or uses. Such groupings are called **composite attributes**.

©2001 John Mylopoulos The Entity-Relationship Model - 16

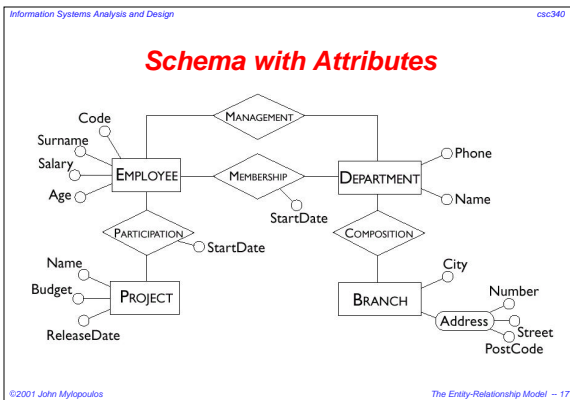

Information Systems Analysis and Design csc340

### Cardinalities

- These are specified for each entity participating in a relationship and describe the maximum and minimum number of relationship occurrences in which an entity occurrence can participate.
- Cardinalities state how many times can an entity instance participate in instances of a given relationship.

©2001 John Mylopoulos The Entity-Relationship Model - 18

Information Systems Analysis and Design csc340

### Cardinalities (cont'd)

- In principle, a cardinality is any pair of non-negative integers (n,m) such that n, m, or a pair of the form (n,N) where N means "any number".
- If minimum cardinality is 0, we say that entity participation in a relationship is optional. If minimum cardinality is 1, we say that entity participation in a relationship is mandatory.
- If maximum cardinality is 1, each instance of the entity is associated at most with a single instance of the relationship; if maximum cardinality is N, then each instance of the entity is associated with an arbitrary number of instances of the relationship.

©2001 John Mylopoulos The Entity-Relationship Model -- 19

Information Systems Analysis and Design csc340

### Cardinality Examples

©2001 John Mylopoulos The Entity-Relationship Model -- 20

Information Systems Analysis and Design csc340

### Cardinality Example

"A course meets three times a week"

"A room can have up to 40 meetings per week"

"A day can have an unlimited number of meetings"

©2001 John Mylopoulos The Entity-Relationship Model -- 21

Information Systems Analysis and Design csc340

### Instantiating ER Diagrams

- An ER diagram specifies what states are possible in the world being modeled

©2001 John Mylopoulos The Entity-Relationship Model -- 22

Information Systems Analysis and Design csc340

### Illegal Instantiations

©2001 John Mylopoulos The Entity-Relationship Model -- 23

Information Systems Analysis and Design csc340

### Cardinalities of Attributes

- They are specified for the attributes of entities (or relationships) and describe the minimum and maximum number of values of the attribute associated with instances of an entity or a relationship.
- In most cases, the cardinality of an attribute is equal to (1,1) and is omitted (*single-valued* attributes)
- The value of a certain attribute however, may also be null, or there may exist several values of a certain attribute for an entity instance (*multi-valued* attributes)

©2001 John Mylopoulos The Entity-Relationship Model -- 24

Information Systems Analysis and Design cac340

## Cardinalities (cont'd)

- Multi-valued attributes should be used with great caution, because they represent situations that can be modelled in many cases with additional entities linked by one-to-many (or many-to-many) relationships to the entity to which they refer.

©2001 John Mylopoulos The Entity-Relationship Model -- 25

Information Systems Analysis and Design cac340

## Identifiers

- Identifiers** (or **keys**) consist of one or more attributes which identify uniquely instances of an entity.
- In many cases, an identifier is formed by one or more attributes of the entity itself: in this case we talk about an **internal** identifier.
- Sometimes, however, the attributes of an entity are not sufficient to identify its instances unambiguously and other entities are involved in the identification. Identifiers of this type are called **external** identifiers.
- An identifier for a relationship consists of identifiers for all the entities it relates. For example, the identifier for the relationship (Person-) Owns(-Car) is a combination of the Person and Car identifiers.

©2001 John Mylopoulos The Entity-Relationship Model -- 26

Information Systems Analysis and Design cac340

## Examples of Identifiers

- internal, single-attribute**: Registration for AUTOMOBILE.
- internal, multi-attribute**: DateOfBirth, Surname, FirstNames, Address for PERSON.
- external, multi-attribute**: Registration, Year, Surname for STUDENT (in relation to ENROLLMENT).

©2001 John Mylopoulos The Entity-Relationship Model -- 27

Information Systems Analysis and Design cac340

## General Observations on Identifiers

- An identifier can involve one or more attributes, provided that each of them has (1,1) cardinality;
- An external identifier can involve one or more entities, provided that each of them is member of a relationship to which the entity to identify participates with cardinality equal to (1,1);
- An external identifier can involve an entity that is in its turn identified externally, as long as cycles are not generated;
- Each entity must have one (internal or external) identifier, but can have more than one. Actually, if there is more than one identifier, then the attributes and entities involved in an identification can be optional (minimum cardinality equal to 0).

©2001 John Mylopoulos The Entity-Relationship Model -- 28

Information Systems Analysis and Design cac340

## Modeling an Application with Identifiers

Identifiers constitute a powerful mechanism for modeling an application. Assume we want a database storing information about lecture meetings.

- Suppose first that we use the identifier *coursename, day, hour* for the Meeting entity. This says, that there can only be one meeting at any one time for a given course name, day, hour; in other words, we can't have two sections of the same course meeting at the same day+hour.
- Suppose now we use only *coursename* as identifier for Meeting. This says that there can only be one meeting per given course name (unreasonable!)
- If we use *courseinstructor, room* as identifier for Meeting, we are stating that there can only be one meeting for a given instructor+room combination, so an instructor must have all her meetings in different rooms!
- Finally, if the attribute *courseinstructor* by itself forms an identifier for Meeting, then the diagram we have built is stating that each instructor participates in at most one meeting, again this is unreasonable.

©2001 John Mylopoulos The Entity-Relationship Model -- 29

Information Systems Analysis and Design cac340

## Consider...

(1,1)

- Assume that we want to keep track of course offerings over the years.
- What does each of the following combinations of attributes say about the application?
  - name;
  - name, sem, year;
  - sem, year;
  - name, dept;
  - dept, year.

©2001 John Mylopoulos The Entity-Relationship Model -- 30



Information Systems Analysis and Design cac340

## Business Rules

- Business rules are used to describe the properties of an application, e.g., the fact that an employee cannot earn more than his or her manager.
- A business rule can be:
  - ✓ the **description** of a concept relevant to the application (also known as a **business object**),
  - ✓ an **integrity constraint** on the data of the application,
  - ✓ a **derivation rule**, whereby information can be derived from other information within a schema.

©2001 John Mylopoulos The Entity-Relationship Model -- 37

Information Systems Analysis and Design cac340

## Documentation Techniques

- Descriptive business rules can be organized as a *data dictionary*. This is made up of two tables: the first describes the entities of the schema, the others describes the relationships.
- Business rules that describe constraints can be expressed in the following form:
  - <concept> must/must not <expression on concepts>
- Business rules that describe derivations can be expressed in the following form:
  - <concept> is obtained by <operations on concepts>

©2001 John Mylopoulos The Entity-Relationship Model -- 38

Information Systems Analysis and Design cac340

## Example of a Data Dictionary

Entity	Description	Attributes	Identifier
EMPLOYEE	Employee working in the company.	Code, Surname, Salary, Age	Code
PROJECT	Company project on which employees are working.	Name, Budget, ReleaseDate	Name
....	....	....	....

Relationship	Description	Entities involved	Attributes
MANAGEMENT	Associate a manager with a department.	Employee (0,1), Department (1,1)	
MEMBERSHIP	Associate an employee with a department.	Employee (0,1) Department (1,N)	StartDate
....	....	....	....

©2001 John Mylopoulos The Entity-Relationship Model -- 39

Information Systems Analysis and Design cac340

## Examples of Business Rules

Constraints
(BR1) The manager of a department must belong to that department.
(BR2) An employee must not have a salary greater than that of the manager of the department to which he or she belongs.
(BR3) A department of the Rome branch must be managed by an employee with more than 10 years' employment with the company.
(BR4) An employee who does not belong to a particular department must not participate in any project.
....
Derivations
(BR5) The budget for a project is obtained by multiplying the sum of the salaries of the employees who are working on it by 3.
....

©2001 John Mylopoulos The Entity-Relationship Model -- 40

Information Systems Analysis and Design cac340

## Comparison of ER and Class Diagrams

- ER diagrams allow N-ary relationships, N > 2; Class diagrams only allow binary relationships.
- ER diagrams allow multi-valued attributes, class diagrams do not.
- ER diagrams allow the specification of identifiers (an often-encountered type of constraint), while class diagrams do not.
- Class diagrams allow dynamic classification, but ER diagrams do not.

©2001 John Mylopoulos The Entity-Relationship Model -- 41