CSC209

Software Tools & Systems Programming in UNIX

W. James MacLean maclean@cdf.toronto.edu PT290F, 978-6277 About CSC209

General Info

Slide

Slide

- L0101: Meets Monday & Wednesday, 12pm in SS2118; Tutorials Fridays at 12pm
- L0501: Meets Thursday, 7pm in RW110; Tutorials Thursdays at 6pm
- Website: http://www.cs.toronto.edu/~maclean/csc209/Spring00/
- Newsgroup: <u>ut.cdf.csc209</u> (or send e-mail to <u>ut.cdf.csc209h@cdf.toronto.edu</u>) Spring 2000 CSC209: Software Tools & Systems Programming

Assignments

Slide

Slide

- Assignment #1: 5% Fri, Feb 4th
 Shell Scripts
- Assignment #2: 10% Fri, Feb 18th
 Utilities, File/Directories
- Assignment #3: 10% Fri, Mar 17th


 Inter-process communication
- Assignment #4: 15% Fri, Apr 7th
 Sockets & Threads

CSC209: Software Tools & Systems Programming

- Assignments are due *at the beginning* of tutorials. Late assignments should be submitted to D.L. Pratt Bldg., room 283. Penalties for late submissions:
 - Time of submission (based on electronic submission time):
 by 5pm on due date penalty = 20% (of the maximum mark)
 - by 9am three days after due date penalty = 40%
 - after 9am three days after due date penalty = 100%
- The late penalties are only waived for a good reason such as a documented medical or other emergency. Discuss such excuses with the instructor, *not* with your tutor.

Spring 2000

CSC209: Software Tools & Systems Programming





hand in anything written by someone else without acknowledgement.


Spring 2000

Spring 2000

CSC209: Software Tools & Systems Programming

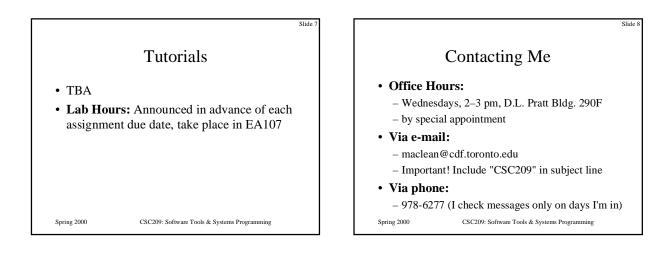

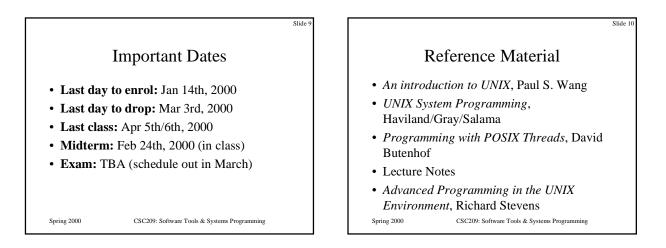

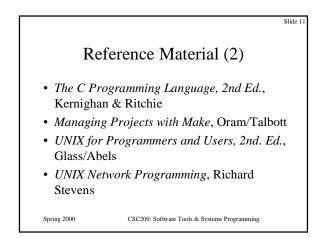


Course Content


• Why UNIX? History

Spring 2000

- UNIX Basics: Processes, Login
- Shells: command processing, running programs, shell programming
- I/O: file descriptors vs. streams
- Processes: creating, destroying, monitoring
- System Calls, Standard C Library

CSC209: Software Tools & Systems Programming

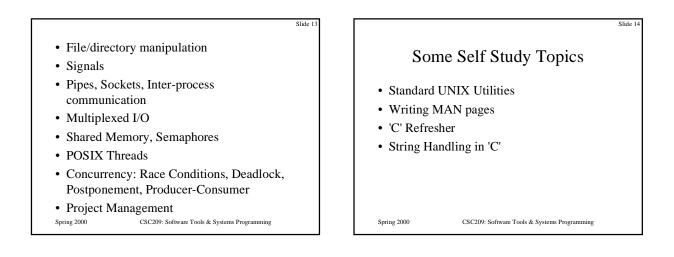

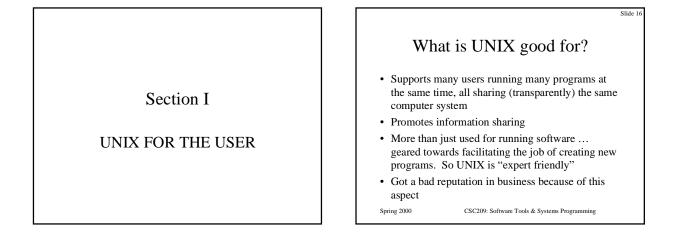

History (Introduction)

- Ken Thompson working at Bell Labs in 1969 wanted a small MULTICS for his DEC PDP-7
- He wrote UNIX which was initially written in assembler and could
- handle only one user at a time
 Dennis Ritchie and Ken Thompson ported an enhanced UNIX to a
- PDP-11/20 in 1970
 Ritchie ported the language BCPL to UNIX in 1970, cutting it down to fit and calling the result "B"
- In 1973 Ritchie and Thompson rewrote UNIX in "C" and enhanced it some more
- Since then it has been enhanced and enhanced and enhanced and
- See Wang, page 1 for a brief discussion of UNIX variations
- POSIX (portable operating system interface) IEEE, ANSI
- Spring 2000 CSC209: Software Tools & Systems Programming


Some Terminology


- <u>Program</u>: executable file on disk (machine language binary or script)
- Process: executing instance of a program
- <u>Process ID</u>: unique, non-negative integer identifier (a handle by which to refer to a process)
- <u>UNIX kernel:</u> a C program that implements a general interface to a computer to be used for writing programs
- <u>System call:</u> well-defined entry point into kernel, to request a service
- <u>UNIX technique:</u> for each system call, have a function of same name in the standard C library
 - user process calls this function
 - function invokes appropriate kernel service


Spring 2000 CSC20


CSC209: Software Tools & Systems Programming


		Slide
Logg	ing in	
 Login name, password 		
System password file: usually "/e	etc/passwd"	
 /etc/passwd has 7 colon-sepa 	arated fields:	
		٦
maclean:x:132:114:J		
	var/shell/tcsh	
*****6****	*****7*****	
~~~~6~~~~ ~	*****	
1: user name	5: "in real life"	
<b>`</b>		
1: user name	5: "in real life"	

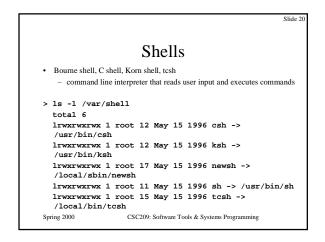


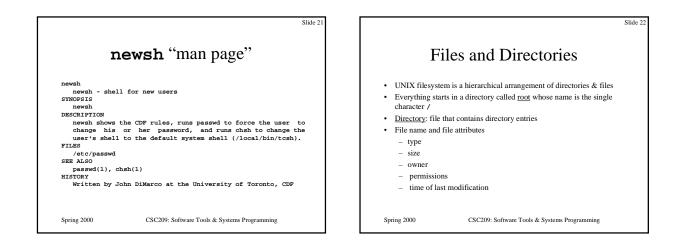


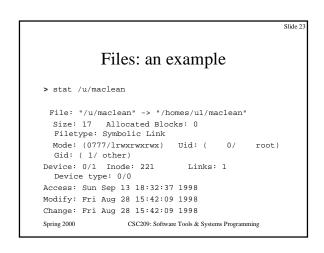

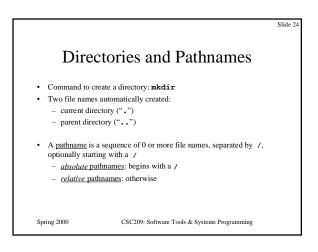


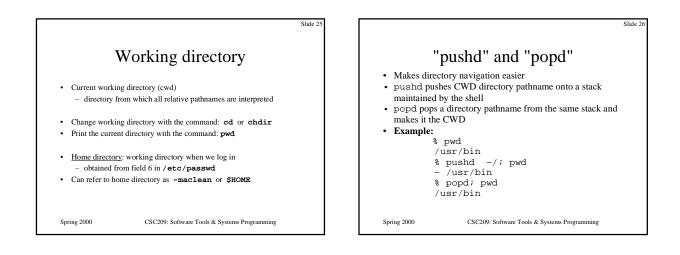


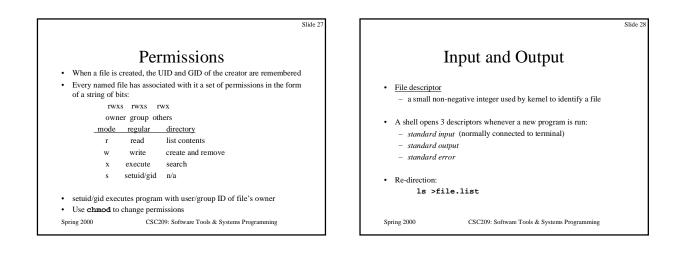


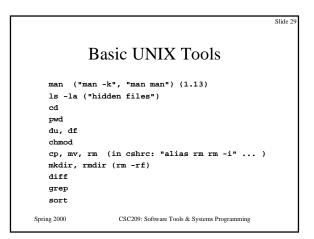





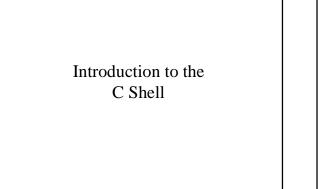

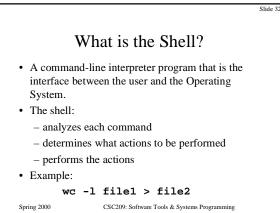


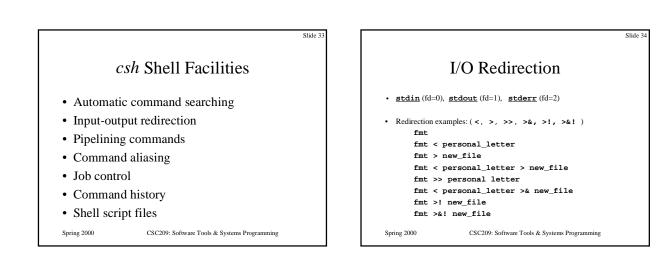


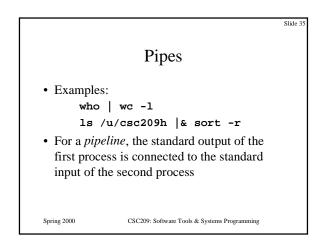


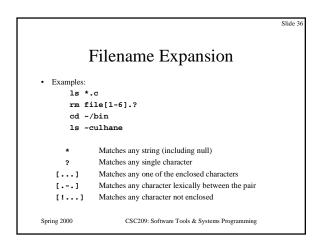



		Slide 37
С	command Aliases	
• Examples:		
alia	s md mkdir	
alia	slcls-F	
alia	s rm rm -i	
\rm	*.0	
unal	ias rm	
alia	s	
alia	is md	
alia	as cd 'cd \!*; pwd'	
Spring 2000	CSC209: Software Tools & Systems Programming	

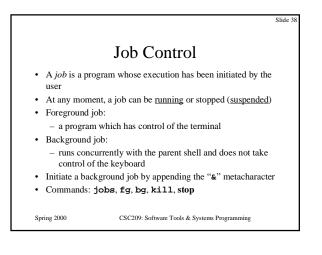


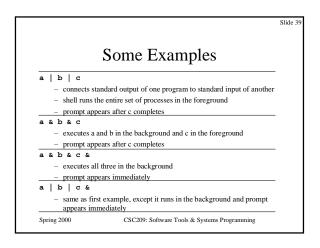


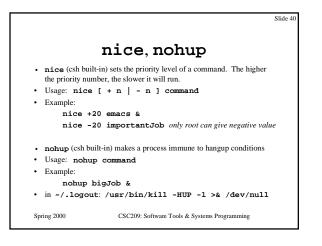


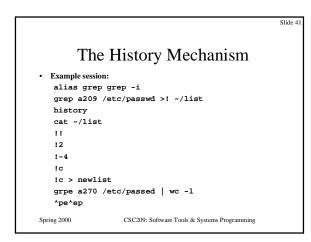


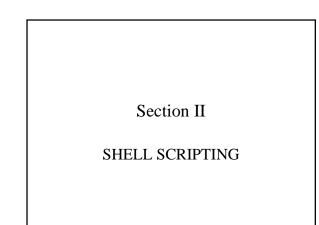


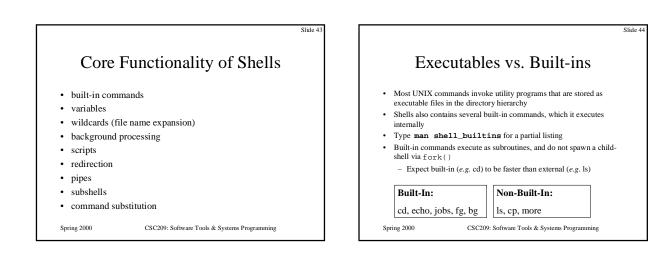


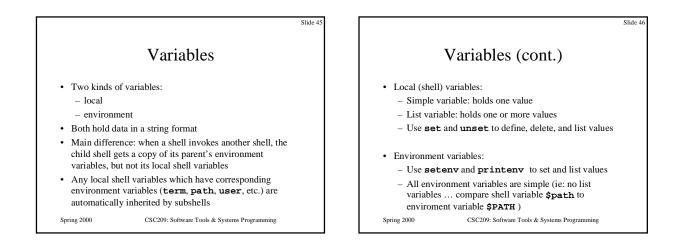

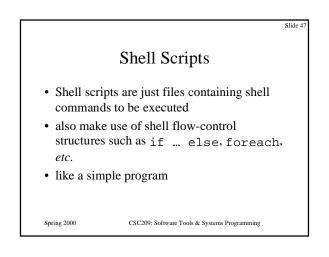

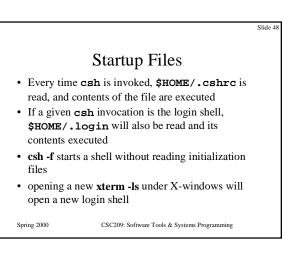

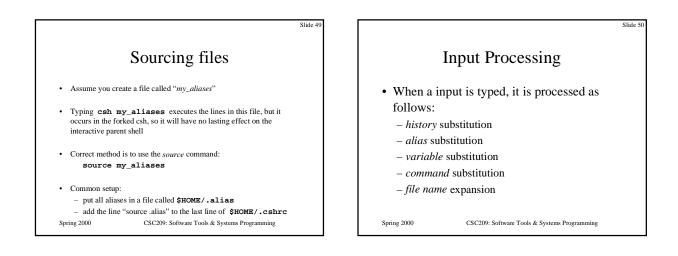


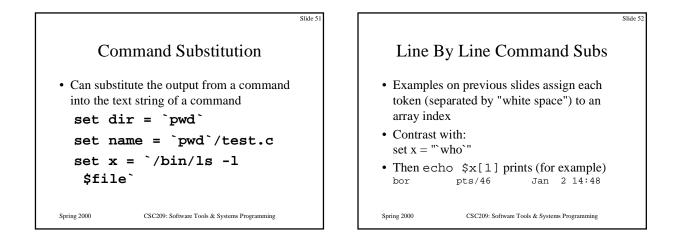



S	hell Variables	Slide 53
	(setting)	
• Examples:		
set V		
set V = a	bc	
set V = (	123 def ghi)	
set V[2]	= xxxx	
set		
unset V		
Spring 2000	CSC209: Software Tools & Systems Programming	


	Slide 54
Shell Variables	
(referencing and testing)	
Examples:	
echo \$term	
echo \${term}	
echo \$V[1]	
echo \$V[2-3]	
echo \$V[2-]	
set W = \${V[3]}	
set $V = (abc def ghi 123)$	
set N = $\#V$	
echo \$?name	
echo \${?V}	
Spring 2000 CSC209: Software Tools & Systems Programming	


	Slide 55
St	nell Control Variables
filec	a given with tcsh
prompt	my favourite: set prompt = "%m:%~%#"
ignoreeof	disables Ctrl-D logout
history	number of previous commands retained
mail	how often to check for new mail
path	list of directories where csh will look for commands (†)
noclobber	protects from accidentally overwriting files in redirection
noglob	turns off file name expansion
<ul> <li>Shell variab</li> </ul>	les should not to be confused with Environment variables.
Spring 2000	CSC209: Software Tools & Systems Programming
-	

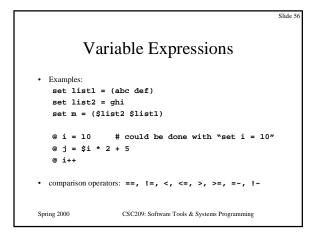


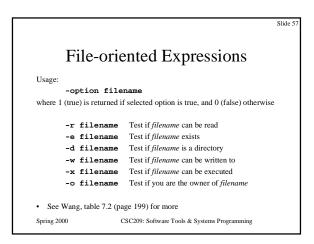


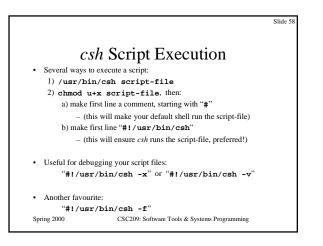


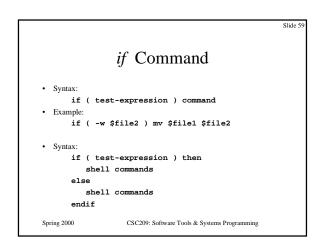


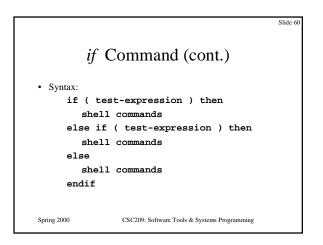


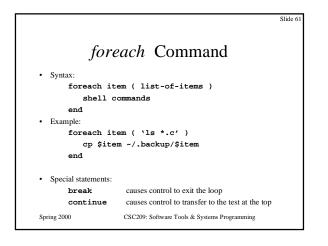


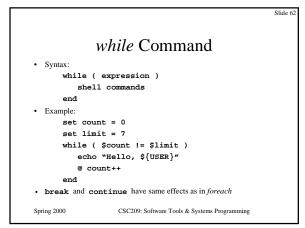


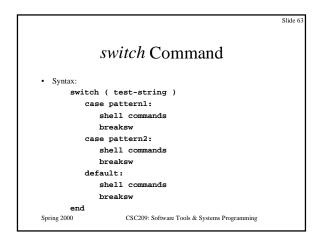


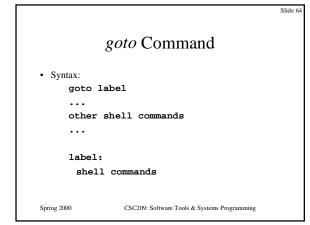

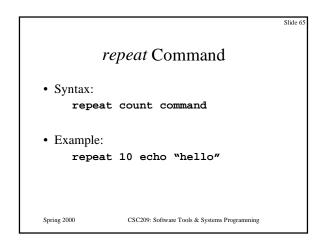


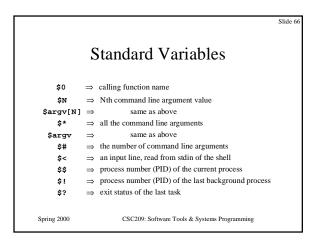


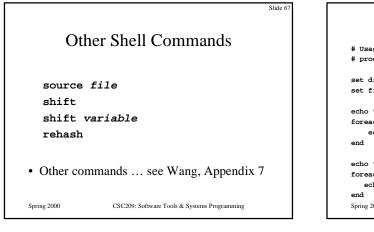


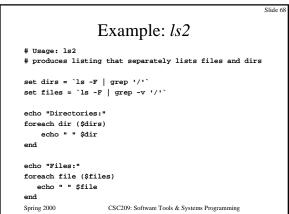



	Slide
Example: components	
#!/usr/bin/csh -f	
set test = a/b/c.d	
echo "the full string is:" \$test	
echo "extension (:e) is: " \$test:e	
echo "head (:h) is: " \$test:h	
echo "root (:r) is: " \$test:r	
echo "tail (:t) is: " \$test:t	
### output:	
# the full string is: a/b/c.d	
<pre># extension (:e) is: d</pre>	
<pre># head (:h) is: a/b</pre>	
<pre># root (:r) is: a/b/c</pre>	
<pre># tail (:t) is: c.d</pre>	
Spring 2000 CSC209: Software Tools & Systems Programming	

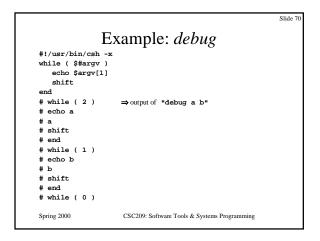


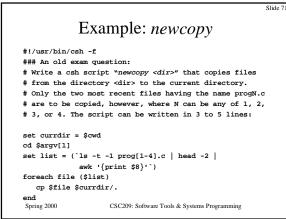


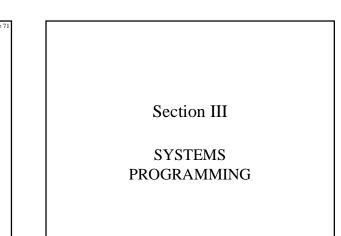


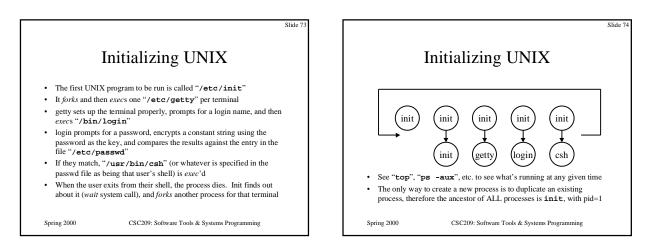


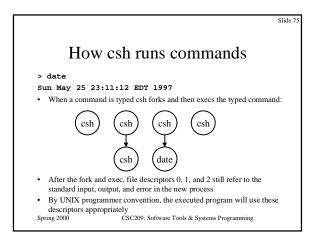


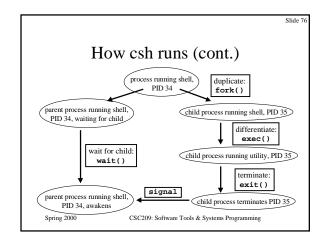


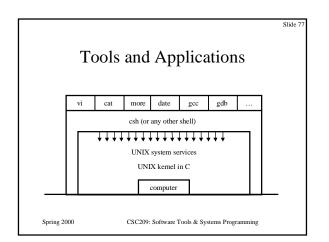


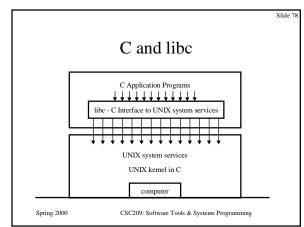


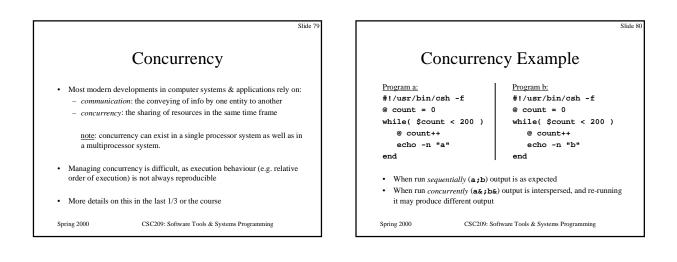


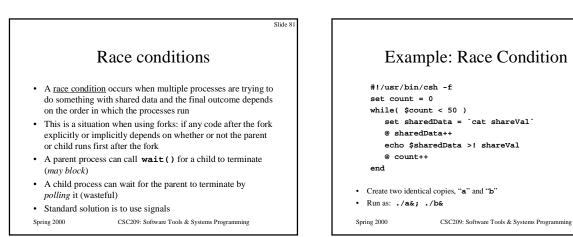


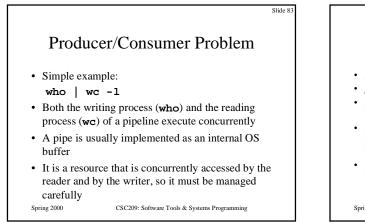


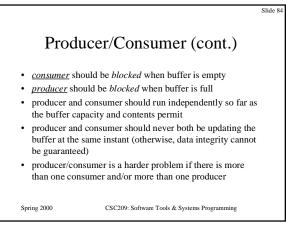


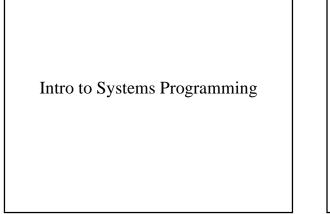


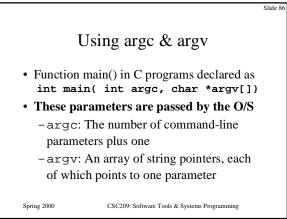


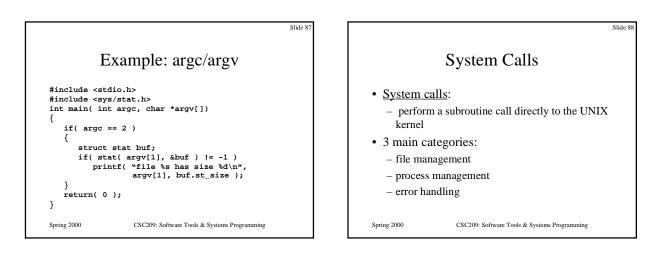


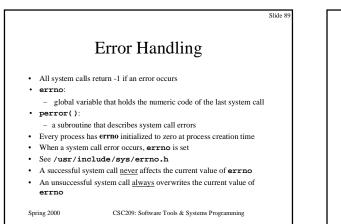


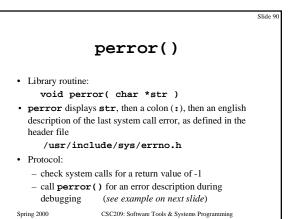


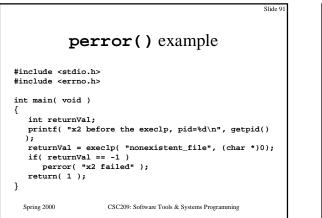


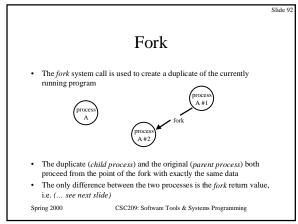


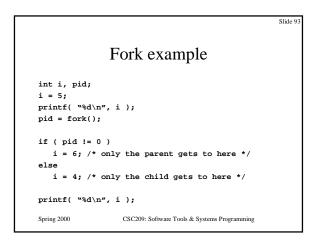


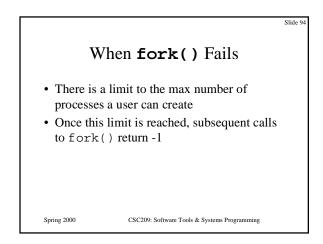


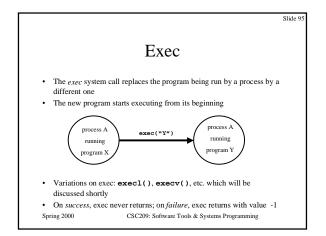


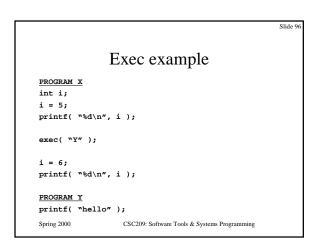


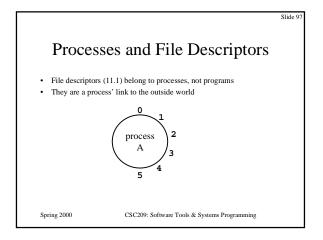


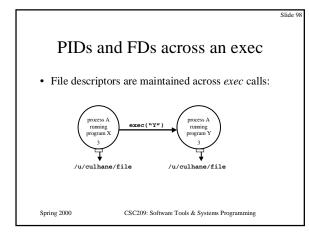


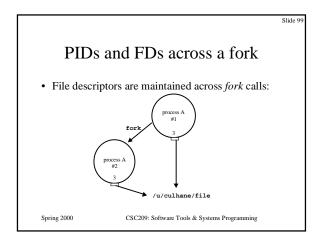


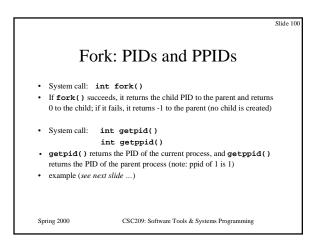


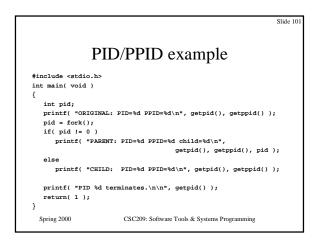


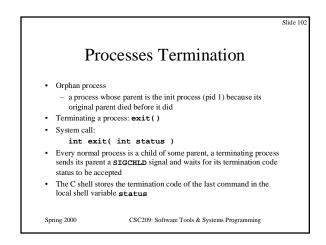


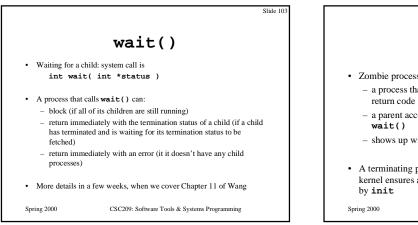


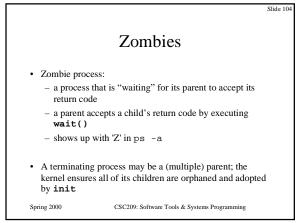


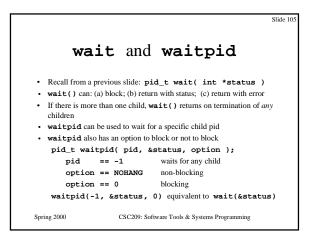


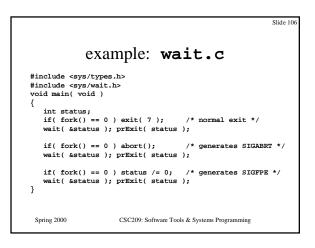


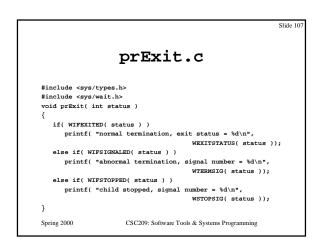


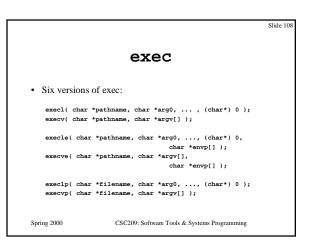


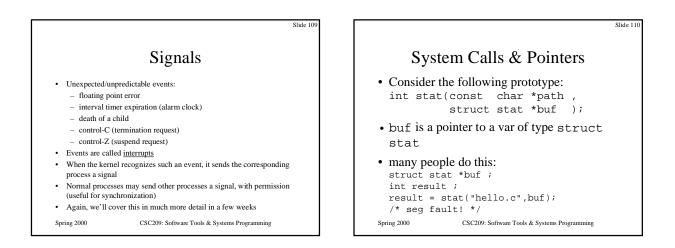


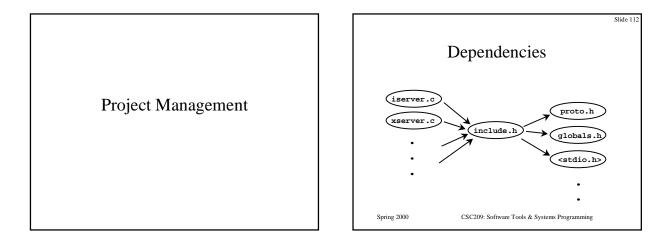


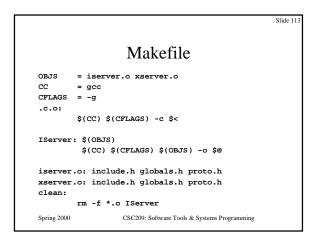


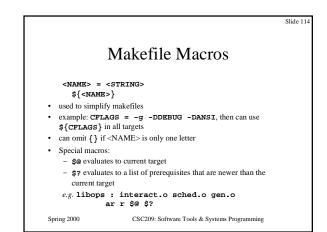


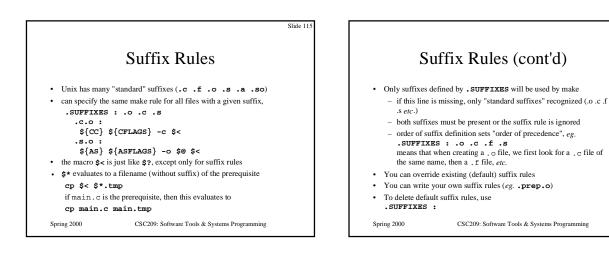


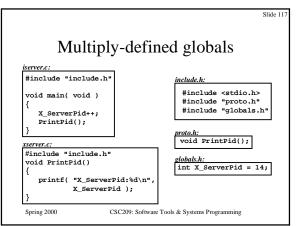


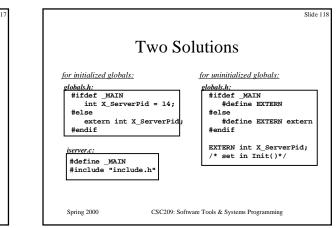


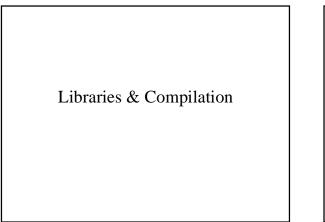


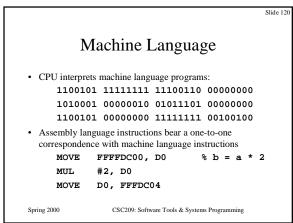


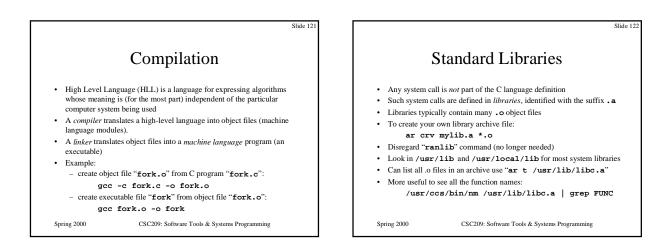


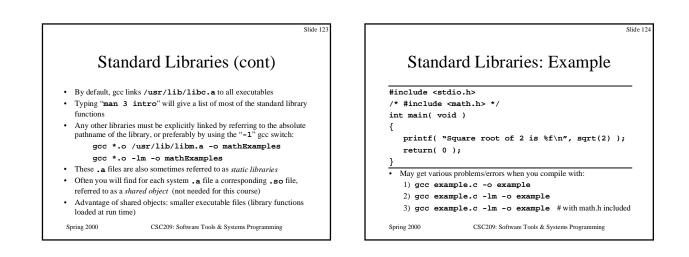


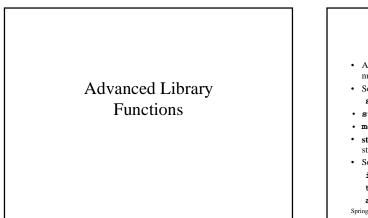


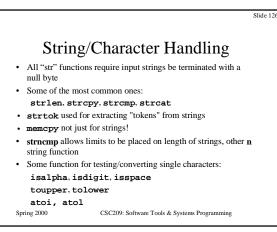


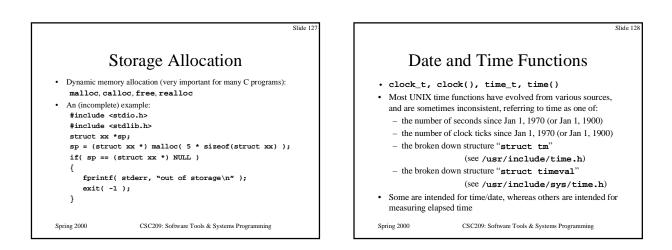


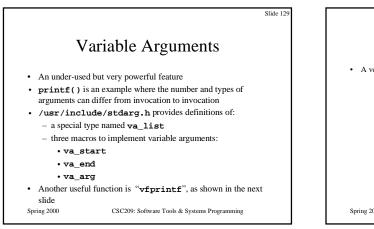


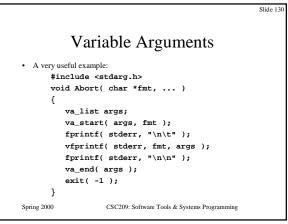


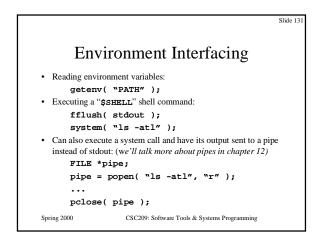


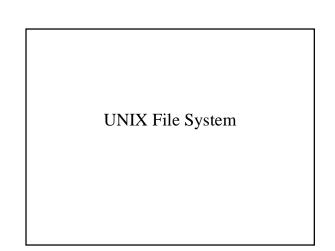


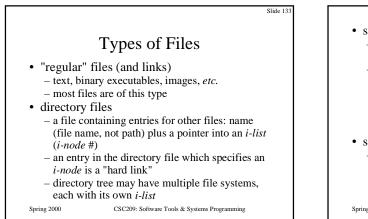


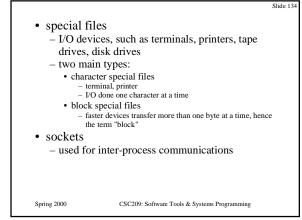


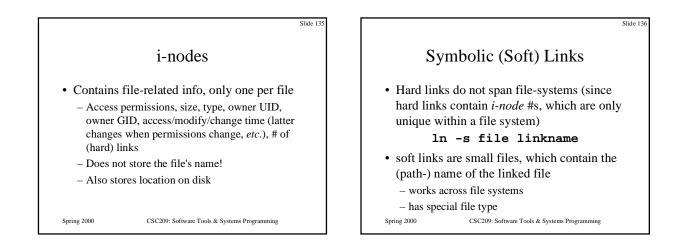


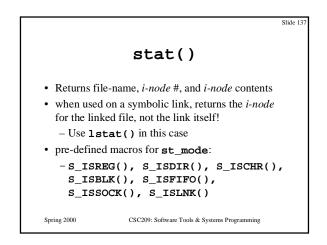


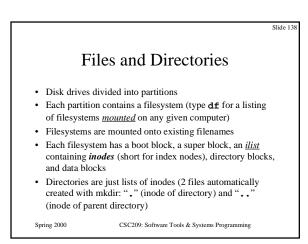

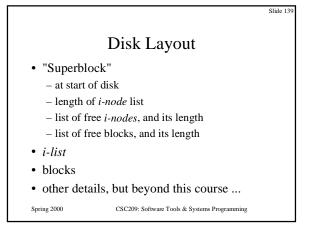

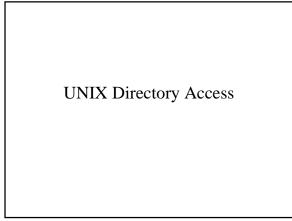


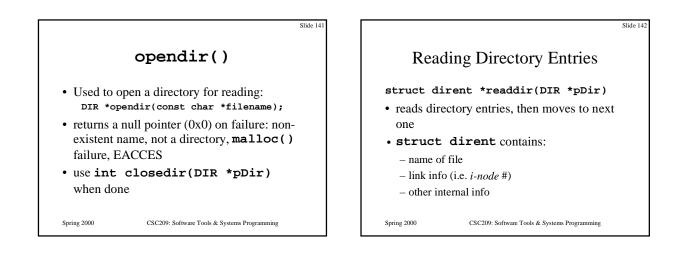


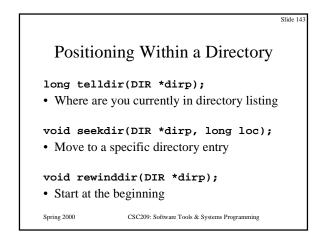






Streams vs. File Descriptors

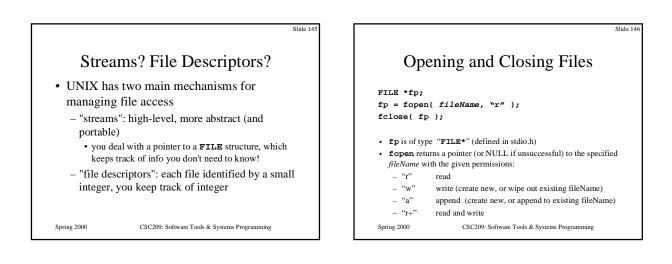


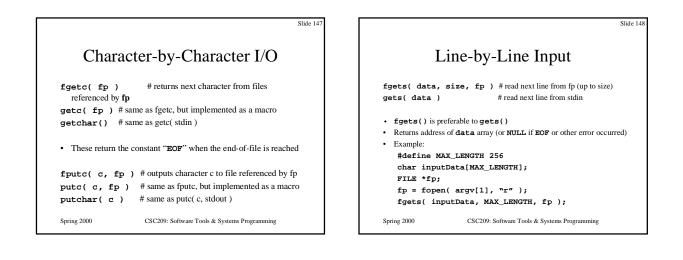


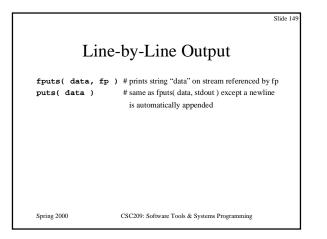


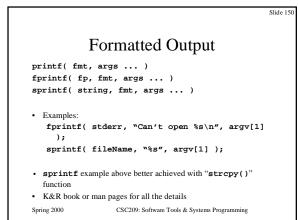


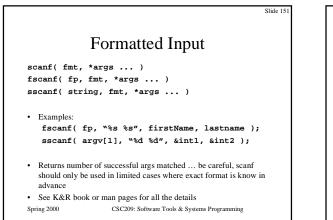


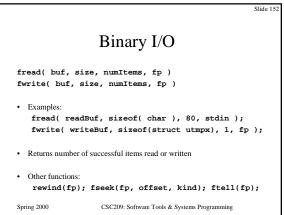


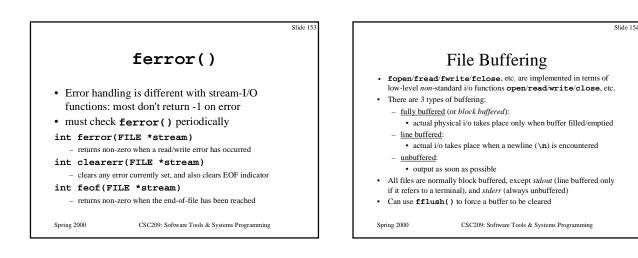


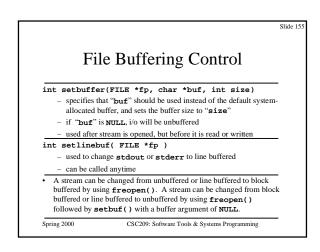

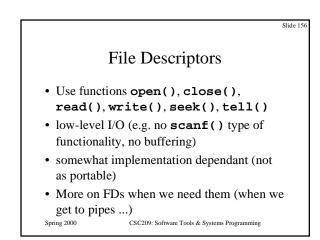

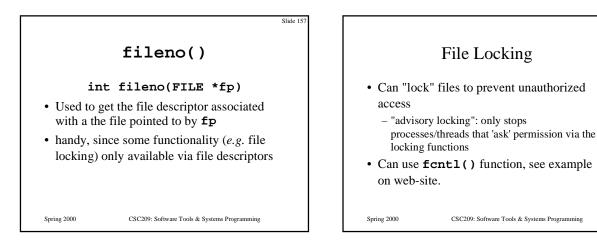

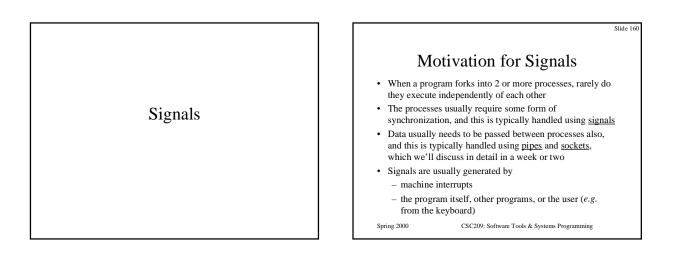

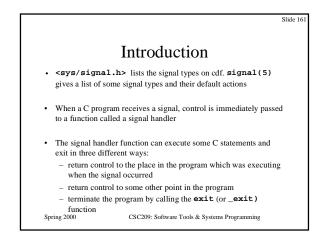



### signal()


- · A default action is provided for each kind of signal, such as terminate, stop, or ignore
- For nearly all signal types, the default action can be changed using the signal() function. The exceptions are SIGKILL and SIGSTOP
- Usage: signal(int sig, void (*disp)(int))
- · For each process, UNIX maintains a table of actions that should be performed for each kind of signal. The signal() function changes the table entry for the signal named as the first argument to the value provided as the second argument
- The second argument can be **SIG_IGN** (ignore the signal), SIG_DFL (perform default action), or a pointer to a signal handler function Spring 2000


CSC209: Software Tools & Systems Programming


Slide 15

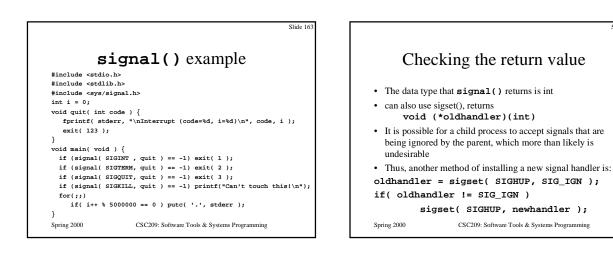


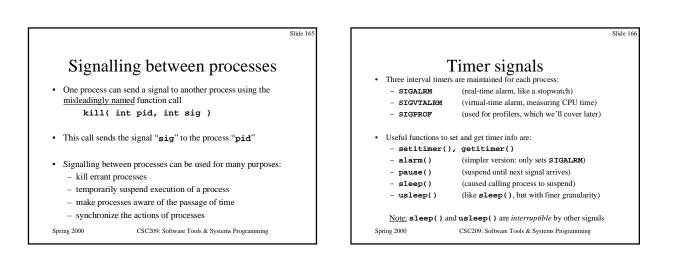


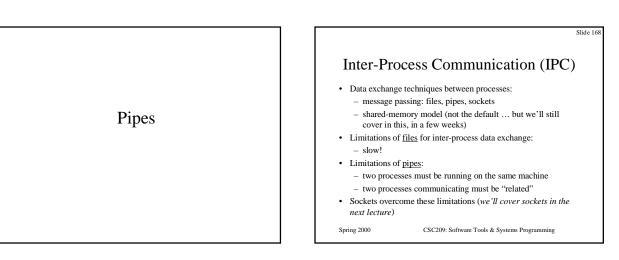


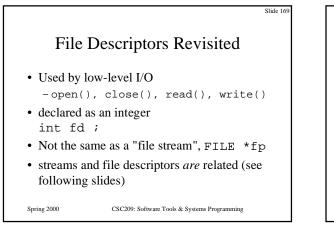


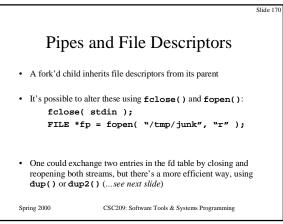


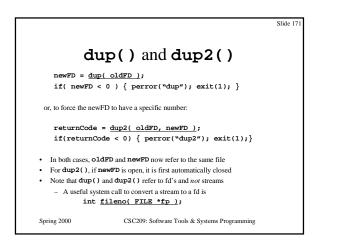


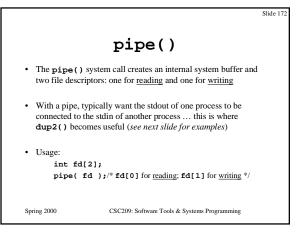


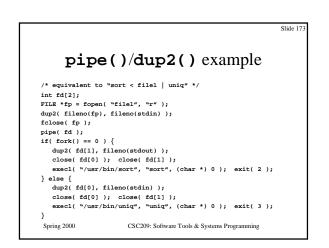


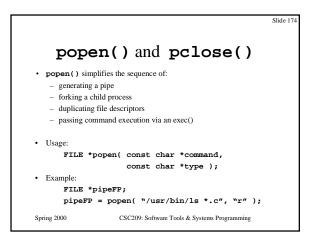


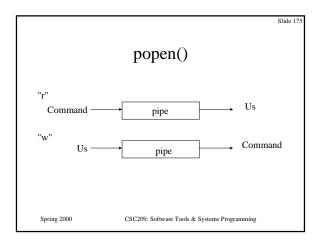


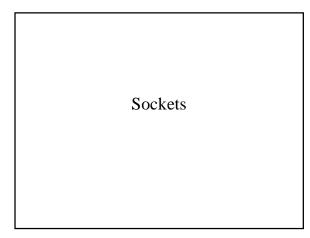


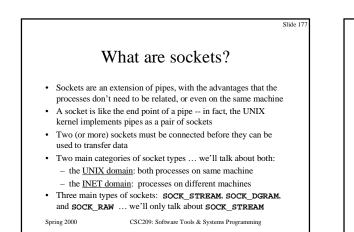


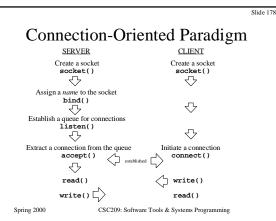


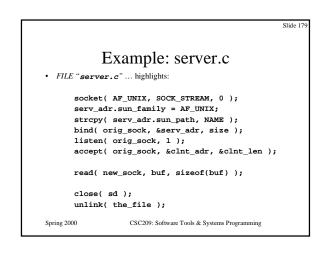

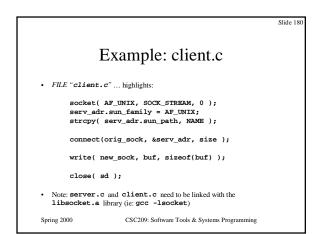

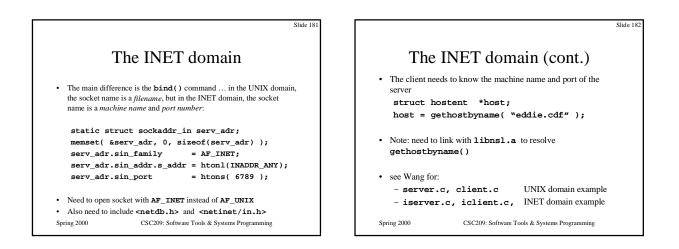

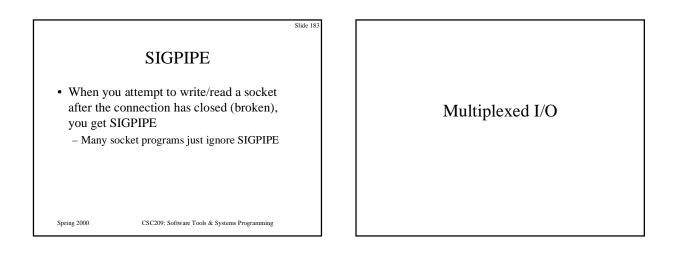


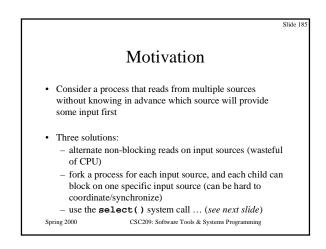

## Background: Number Representations

- All floats/integers stored in binary! (despite what people tell me on exams ⁽ⁱⁱⁱ⁾)
- char: 1 byte, int: 2-4 bytes, long int: 4 bytes, float: 4 bytes, double: 8 bytes
- unsigned int: simple binary 5 = 000000000000101
- int: two's complement (invert bits & add 1) -5 = 11111111111111011 Spring 2000 CSC209: Software Tools & Systems Programming

```
CSC209: Software Tools & Systems Programming
```

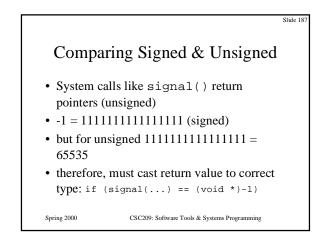

## Background: Turning Bits On/Off

Slide 18

- Assume unsigned integer representation:
- How to turn on bit n of integer x?
   x |= (1 << n)</li>
- How to turn off bit n of integer x?
   x &= ~(1 << n)</li>


Spring 2000


• Used for setting "flags" in status variables


• E.g. open("fred.txt", O_CREAT | O_RDWR)


CSC209: Software Tools & Systems Programming


Slide 189
Spring 2000
Slide 189
Spring 2000
Set Software Tools & Systems Programming
State State

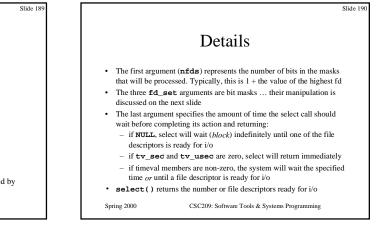


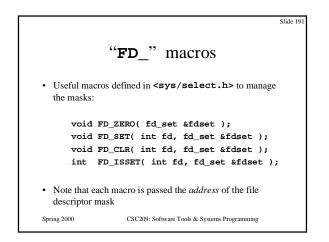


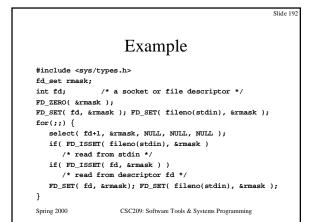


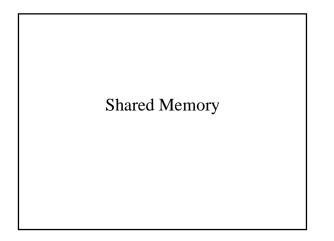


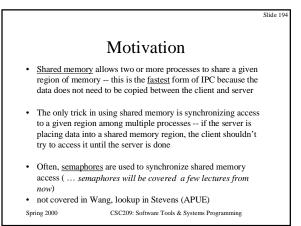


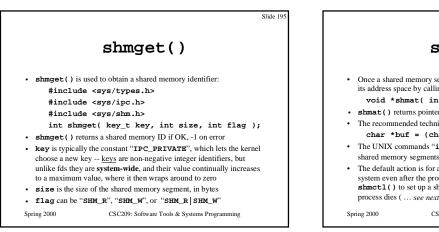


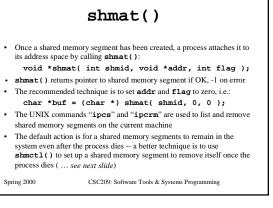


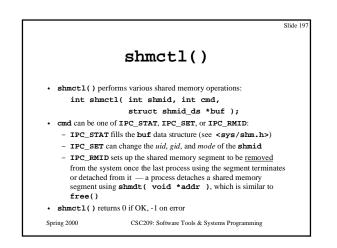


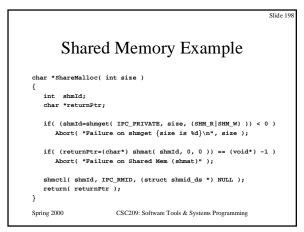


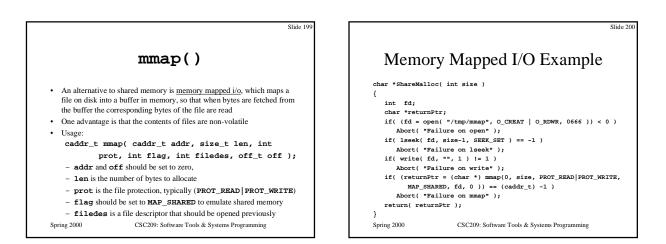


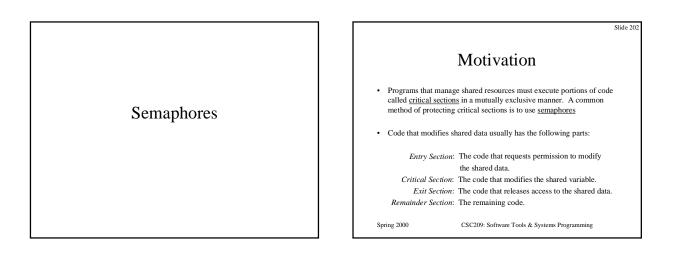


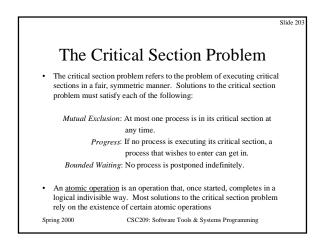


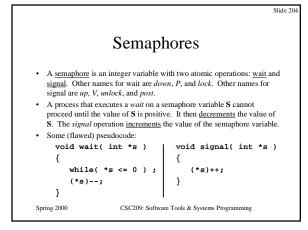


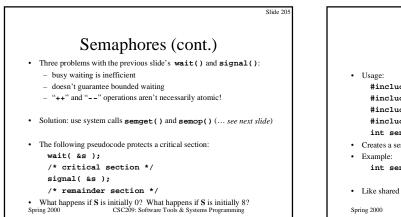

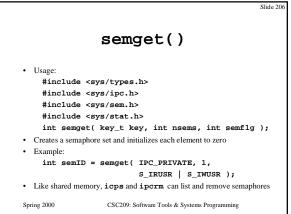

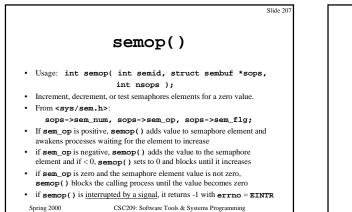

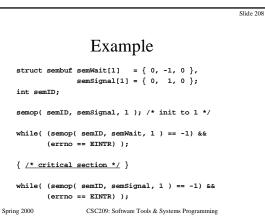

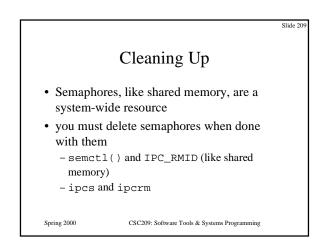

Posix Threads

