

## Data Structure: the "Structure"

## Representing a parse tree

Simple grammar:

```

<np> ::= <det> <adjList> <n>
<adjList> ::= { <adj> }
<det> ::= the | a
<n> ::= child | dog | professor
<adj> ::= small | friendly | noisy

```

Parse tree:

Representation as a Prolog structure:

66

Prolog Program:

```

(1) SQDIST(p2(X1,Y1), p2(X2,Y2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       D is XD*XD + YD*YD.

(2) SQDIST(p3(X1,Y1,Z1), p3(X2,Y2,Z2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       ZD is Z1-Z2,
       D is XD*XD + YD*YD + ZD*ZD.

```

Query: SQDIST(p2(1,2), p2(3,5), D)

This query unifies with the head of rule (1) with {X1\1, Y1\2, X2\3, Y2\5}

so, XD is X1-X2 = 1-3 = -2  
 YD is Y1-Y2 = 2-5 = -3  
 D is (-2)<sup>2</sup> + (-3)<sup>2</sup> = 13  
 So, D=13 is returned

Note: the query does not unify with the head of rule (2), so only rule (1) is used.

71

## Data Structures - Function Terms

Data Structures are actually just Prolog Function Terms.

Prolog Function terms do not have values. They just act like data structures.

Acknowledgements to Tony Bonner for the Function Symbol slides that follow on functions.

68

## Function Symbols in Prolog

In logic, there are two kinds of objects: predicates and functions.

- Predicates represent statements about the world:

```

John hates Mary: hates(john,mary).
John is short: short(john)

```

(hates is a predicate symbol, short(john) is an atomic formula)

- Function terms represent objects in the world: the mother of Mary: mother-of(mary)  
 a rectangle of length 3 and width 4:  
 rectangle(3,4)

(mother-of(mary) is a function term, rectangle is a function symbol)

69

Function terms do not have values. In Prolog, they act as data structures:

let p2(X,Y) denote a point in 2-dim space  
 let p3(X,Y,Z) denote a point in 3-dim space.

Write a Prolog program, SQDIST(Point1,Point2,D), that returns the square of the distance between two points. The program should work for 2- and 3-dim points.

Want:

```

SQDIST(p2(1,2), p2(3,5), D)
  returns D = (3-1)**2 + (5-2)**2
           = 4+9 = 13
and
SQDIST(p3(1,1,0), p3(2,2,3), D)
  returns D = (1-2)**2 + (1-2)**2 + (0-3)**2
           = 1+1+9 = 11
and
SQDIST(p2(0,0), p3(1,1,1), D)
  is undefined

```

70

Prolog Program:

```

(1) SQDIST(p2(X1,Y1), p2(X2,Y2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       D is XD*XD + YD*YD.

(2) SQDIST(p3(X1,Y1,Z1), p3(X2,Y2,Z2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       ZD is Z1-Z2,
       D is XD*XD + YD*YD + ZD*ZD.

```

Query: SQDIST(p3(1,1,0), p3(2,2,3), D).

This query unifies with the head of rule (2), with {X1\1, Y1\1, Z1\0, X2\2, Y2\2, Z2\3}

so, XD is 1-2 = -1  
 YD is 1-2 = -1  
 ZD is 0-3 = -3  
 D is 1+1+9 = 11  
 So, D=11 is returned

Note: the query does not unify with the head of rule (1), so only rule (2) is used.

72

Prolog Program:

```

(1) SQDIST(p2(X1,Y1), p2(X2,Y2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       D is XD*XD + YD*YD.

(2) SQDIST(p3(X1,Y1,Z1), p3(X2,Y2,Z2), D)
    :- XD is X1-X2,
       YD is Y1-Y2,
       ZD is Z1-Z2,
       D is XD*XD + YD*YD + ZD*ZD.

```

Query: SQDIST(p2(0,0), p3(1,1,1), D).

Note: this query does not unify with any rule, so Prolog simply returns no, i.e., no answers for D.

73

## Returning Function Terms as Answers

*e.g.*, given a point,  $p2(X,Y)$ , return a new point with double the coordinates. *e.g.*,  
Query:  $double(p2(3,4),P)$   
Answer:  $P = p2(6,8)$ .

Prolog Program:  
 $double(p2(X1,Y1), p2(X2,Y2))$   
 $:- X2 \text{ is } 2*X1,$   
 $Y2 \text{ is } 2*Y1.$

In Plain English: if  $X2 = 2*X1$  and  $Y2 = 2*Y1$ , then the double of  $p2(X1,Y1)$  is  $p2(X2,Y2)$ .

An equivalent program using "=":  
 $double(p2(X1,Y1), P)$   
 $:- X2 \text{ is } 2*X1, Y2 \text{ is } 2*Y1,$   
 $P = p2(X2,Y2).$

Here, "=" is being used to assign a value to variable P. Try to avoid this!!!! It reflects procedural thinking.

74

## Sample Execution

Prolog Program:

```
double(p2(X1,Y1), p2(X2,Y2))
:- X2 is 2*X1,
   Y2 is 2*Y1.
```

Query:  $double(p2(3,4),P)$

The query unifies with the head of the rule, where the mgu is

$\{X1 \setminus 3, Y1 \setminus 4, P \setminus p2(X2,Y2)\}$

The body of the rule then evaluates:

$X2 \text{ is } 2*X1, \text{ i.e., } 6$   
 $Y2 \text{ is } 2*Y1, \text{ i.e., } 8$


The mgu becomes  $\{X1 \setminus 3, Y1 \setminus 4, P \setminus p2(6,8)\}$ .

So, the answer is  $P = p2(6,8)$ .


75

## Recursion with Function Symbols

Example: Electrical circuits




- Two resistors in series, with resistances  $R_1$  and  $R_2$ , respectively.
- Total resistance of the circuit is  $5 + 6 = 11$ .
- Can represent the circuit as a function term:  $series(5,6)$ .




- Two resistors in parallel.
- Total resistance of the circuit is  $\frac{2*3}{2+3} = 1.2$
- Represent the circuit as a function term:  $par(2,3)$ .

76

## More Complex Circuits



$par(3, series(2,3))$



$series(par(4,5), par(2,3))$

77

## Problem:

Write a Prolog program that computes the total resistance of any circuit.

For example,

Query:  $resistance(series(1,2), R)$   
Answer:  $R = 1+2 = 3$

Query:  $resistance(par(2,3), R)$   
Answer:  $R = (2*3)/(2+3) = 6/5 = 1.2$

Query:  $resistance(series(3,par(2,3)), R)$   
Answer:  $R = 3 + 1.2 = 4.2$

Query:  $resistance(3, R)$   
Answer:  $R = 3$


78

## Solution


- (1)  $resistance(R,R) :- number(R).$
- (2)  $resistance(series(C1,C2), R)$   
 $:- resistance(C1, R1),$   
 $resistance(C2, R2),$   
 $R \text{ is } R1+R2.$
- (3)  $resistance(par(C1,C2), R)$   
 $:- resistance(C1, R1),$   
 $resistance(C2, R2),$   
 $R \text{ is } (R1*R2)/(R1+R2).$

Sample Query:  
 $resistance(series(3,par(6,3)), TR)$

*i.e.*, compute the total resistance, TR, of the following circuit:



79

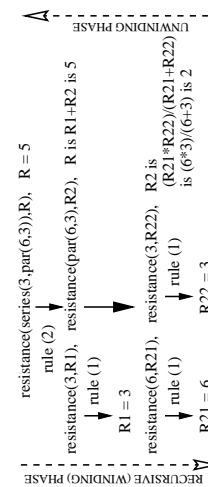

80

## Execution of Prolog Programs

- **Unification**: (variable bindings)  
Specializes general rules to apply to a specific problem.
- **Backward Chaining/ Top-Down Reasoning/ Goal-Directed Reasoning**:  
Reduces a goal to one or more subgoals.
- **Backtracking**:  
Systematically searches for all possible solutions that can be obtained via unification and backchaining.

81

## Unification

Two atomic formulas with distinct variables unify if and only if they can be made syntactically identical by replacing their variables by other terms. For example,

- $\text{loves}(\text{bob}, Y)$  unifies with  $\text{loves}(\text{bob}, \text{sue})$  by replacing  $Y$  by  $\text{sue}$ .
- $\text{loves}(\text{bob}, Y)$  unifies with  $\text{loves}(X, \text{santa})$  by replacing  $Y$  by  $\text{santa}$  and  $X$  by  $\text{bob}$ .

Both formulas become  $\text{loves}(\text{bob}, \text{santa})$ .

Formally, we use the **substitution**

$\{Y \setminus \text{santa}, X \setminus \text{bob}\}$

which is called a **unifier** of  $\text{loves}(\text{bob}, Y)$  and  $\text{loves}(X, \text{santa})$ .

- Note that  $\text{loves}(\text{bob}, X)$  does *not* unify with  $\text{loves}(\text{tony}, Y)$ , since no substitution for  $X, Y$  can make the two formulae syntactically equal.

82

## Rules of Unification

A constant unifies only with itself.

Two structures unify iff they have the same name, number of arguments, and all the arguments unify.

A variable unifies with anything. If the other thing has a value, the variable is **instantiated**. Otherwise, the two are associated in a way such that if one gets a value so does the other.

Unification requires all instances of the same variable in a rule to get the same value

All rules searched, if requested by successive typing of ":",

83

## Unification (cont.)

### Examples:

$p(X, X)$  unifies with  $p(b, b)$  and with  $p(c, c)$ , but not with  $p(b, c)$ .

$p(X, b)$  unifies with  $p(Y, Y)$  with unifier  $X \setminus b, Y \setminus b$  to become  $p(b, b)$ .

$p(X, Z, Z)$  unifies with  $P(Y, Y, b)$  with unifier  $X \setminus b, Y \setminus b, Z \setminus b$  to become  $p(b, b, b)$ .

$p(X, b, X)$  does not unify with  $p(Y, Y, c)$ .

84

## Unification with Function Terms

Prolog uses unification to compute its answers.

*e.g.*, Given the database:

```
owns(john, car(red,corvette))
owns(john, cat(black,siamese,sylvester))
owns(elvis, copyright(song,"jailhouse rock"))
owns(tolstoy, copyright(book,"war and peace"))
owns(elvis, car(red,cadillac))
```

the query  $\text{owns}(\text{Who}, \text{car}(\text{red}, \text{Make}))$  unifies with the following database facts:

- $\text{owns}(\text{elvis}, \text{car}(\text{red}, \text{cadillac}))$ , with unifier  $\{\text{Who} \setminus \text{elvis}, \text{Make} \setminus \text{cadillac}\}$

- $\text{owns}(\text{john}, \text{car}(\text{red}, \text{corvette}))$ , with unifier  $\{\text{Who} \setminus \text{john}, \text{Make} \setminus \text{corvette}\}$

85

## Abstract Examples

- $p(f(X), X)$  unifies with  $p(Y, b)$  with unifier  $\{X \setminus b, Y \setminus f(b)\}$  to become  $p(f(b), b)$ .

- $p(b, f(X, Y), c)$  unifies with  $p(U, f(U, V), V)$  with unifier  $\{X \setminus b, Y \setminus c, U \setminus b, V \setminus c\}$  to become  $p(b, f(b, c), c)$ .

86

## A Negative Example

$p(b, f(X, X), c)$  does *not* unify with  $p(U, f(U, V), V)$ .

Reason:

- To make the first arguments equal, we *must* replace  $U$  by  $b$ .
- To make the third arguments equal, we *must* replace  $V$  by  $c$ .
- These substitutions convert  $p(U, f(U, V), V)$  into  $p(b, f(b, c), c)$ .
- However, *no* substitution for  $X$  will convert  $p(b, f(X, X), c)$  into  $p(b, f(b, c), c)$ .

87

## Another Kind of Negative Example

$p(f(X), X)$  does *not* unify with  $p(Y, Y)$ .

Reason:

- Any unification would require that  $f(X) = Y$  and  $Y = X$
- But no substitution can make  $f(X) = X$
- For example,  
 $f(a) \neq a$ , using  $\{X \setminus a\}$   
 $f(b) \neq b$ , using  $\{X \setminus b\}$   
 $f(g(a)) \neq g(a)$ , using  $\{X \setminus g(a)\}$   
 $f(f(c)) \neq f(c)$ , using  $\{X \setminus f(c)\}$   
etc.

88

## Most General Unifiers (MGU)

The atomic formulas  $p(X, f(Y))$  and  $p(g(U), V)$  have infinitely many unifiers. *e.g.*,

- $\{X \setminus g(a), Y \setminus b, U \setminus a, V \setminus f(b)\}$  unifies them to give  $p(g(a), f(b))$ .
- $\{X \setminus g(c), Y \setminus d, U \setminus c, V \setminus f(d)\}$  unifies them to give  $p(g(c), f(d))$ .

However, these unifiers are more specific than necessary.

The most general unifier (mgu) is  $\{X \setminus g(U), V \setminus f(Y)\}$

It unifies the two atomic formulas to give  $p(g(U), f(Y))$

Every other unifier results in an atomic formula of this form.

The mgu uses variables to fill in as few details as possible.

89

### MGU Example

$$f(W, g(Z), Z)$$

$$f(X, Y, h(X))$$

To unify these two formulas, we need

$$\begin{aligned} Y &= g(Z) \\ Z &= h(X) \\ X &= W \end{aligned}$$

Working backwards from  $W$ , we get

$$\begin{aligned} Y &= g(Z) = g(h(W)) \\ Z &= h(X) = h(W) \\ X &= W \end{aligned}$$

So, the mgu is

$$\{X \setminus W, Y \setminus g(h(W)), Z \setminus h(W)\}$$

90

### More MGU Examples

$t_1$	$t_2$	MGU
$f(x, a)$	$f(a, Y)$	
$f(h(x, a), b)$	$f(h(g(a, b), Y), b)$	
$g(a, W, h(x))$	$g(Y, f(Y, Z), Z)$	
$f(x, g(x), Z)$	$f(Z, Y, h(Y))$	
$f(x, h(b, x))$	$f(g(P, a), h(b, g(Q, Q)))$	

91

### Syntax of Substitutions

Formally, a substitution is a set

$$\{v_1 \setminus t_1, \dots, v_n \setminus t_n\}$$

where the  $v_i$ 's are distinct variable names  
and the  $t_i$ 's are terms that do not use  
**any** of the  $v_j$ 's.

Positive Examples:

$$\begin{aligned} &\{X \setminus a, Y \setminus b, Z \setminus f(a, b)\} \\ &\{X \setminus W, Y \setminus f(W, V, a), Z \setminus W\} \end{aligned}$$

Negative Examples:

$$\begin{aligned} &\{f(X) \setminus a\} \\ &\{X \setminus a, X \setminus b\} \\ &\{X \setminus f(X)\} \\ &\{X \setminus f(Y), Y \setminus g(a)\} \end{aligned}$$

92