


Deployment

CSC309

Kian Abbasi

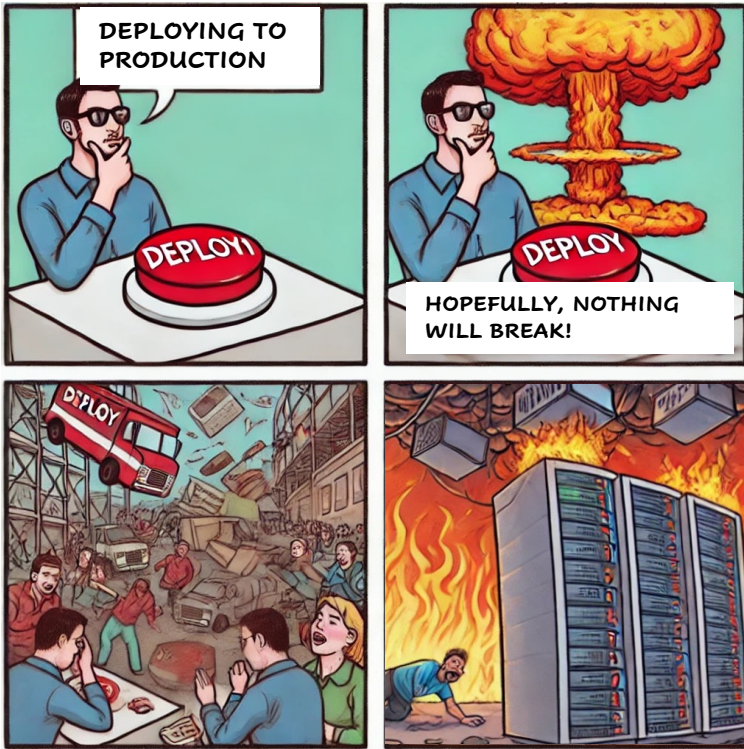

This session

- **Hosting** your application
- Backend and frontend **deployment**
- DevOps
- Course conclusion

What is a server?

- It's another **computer** (or virtual machine), like your local one!
- It should have a **static public** IP address
 - And maybe a **domain** bound to that IP
- Get a server from AWS, Azure, Google Cloud, etc.
 - Some platforms offer small **virtual machines** (VM) **for free**!
- But that's **not** only about IP and the machine!

Get a domain

< Step 2: DNS and Host Records options

3/3 DNS / Host Records
Host Records options

What to do with Host Records?

Any changes to host records and email settings here will impact all selected domains. Due to propagation, changes will take some time to apply. Follow this link for more info. [Learn More →](#)

Click to add Host Records

A

+

AAAA

+

CNAME

+

NS

+

SPF

+

TXT

+

URL REDIRECT

+

A RECORD

frontend

@

26.78.129.90

30 minutes

A RECORD

backend

core

26.78.129.90


30 minutes

Save Changes Cancel

Development vs Production

- IP only determines **how** your application can be **accessed**
- You can access your local website within the same network
 - Just need to run `npm run dev -H 0.0.0.0`
- Development vs production is about **how** you **run** your application!

Development vs Production

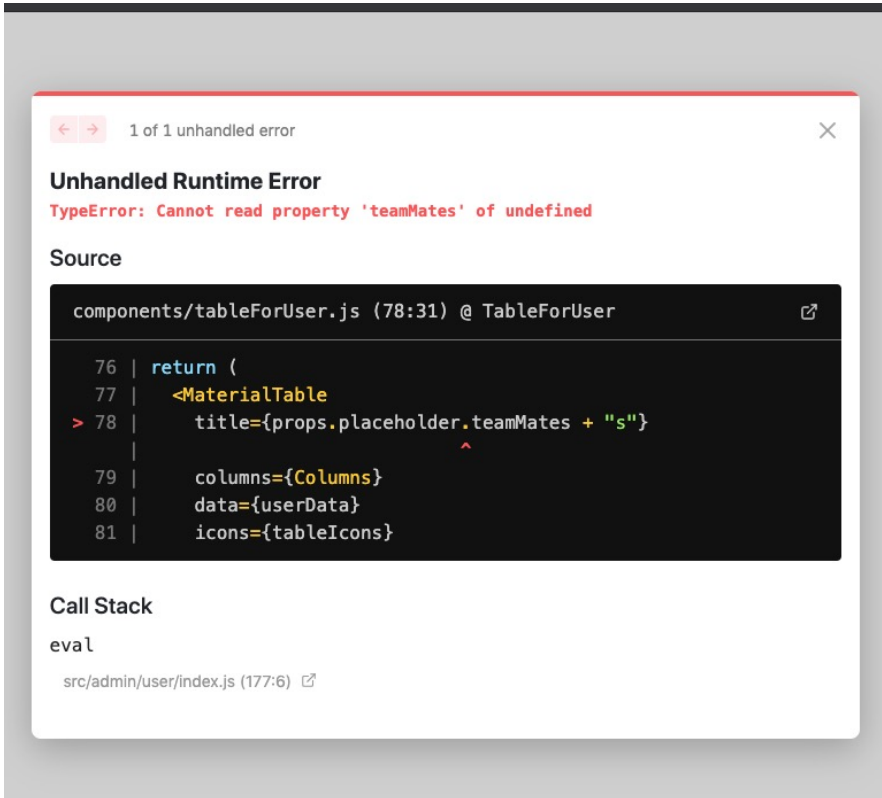

<https://github.com/vercel/next.js/discussions/12956>

500 Internal Server Error

nginx

Development vs Production

- Uses a test database
 - Sometimes even a **smaller** engine like SQLite
- Upon errors, the actual **stack trace** is shown
- Run with a development **server**
- Uses a real **database** with **user data**: Postgres, MySQL, ...
- Just a **generic** 500 or 404 is shown
- Run with a real **webserver**

Deploying a Next.js project

General notes

- **Important:** make sure to install the **latest version** of node
 - The one immediately available on apt is **not** necessarily **up-to-date**
- **Clone** your code on your server
Install dependencies and deploy migrations
`npm install`
`npx prisma generate`
`npx prisma migrate deploy`
- Your app can start via `npm run dev` and accessed via the server's **IP address**
 - But it's still the **development** mode

Production env

- Some of developments env variables need to be **overridden!**

- Examples

`DATABASE_URL`

`ACCESS_TOKEN_SECRET`

`REFRESH_TOKEN_SECRET`

`GOOGLE_MAPS_API_KEY`

Production settings

- create a `.env` file and write all settings to that file
 - Create separate files like `.env.production` and `.env.development` for overrides
- Frontend env variables should start with `NEXT_PUBLIC_`
 - They will be `shared` with browser.
- Note: The env files **must not** be on git!
 - Do push the list of keys (e.g., `env.sample`) to git!

Development mode

- So far, we've run Next.js apps with `npm run dev`
 - This is the development mode
- **Hot reload**
 - No need to **restart** the server when a file changes
- Error **tracing** and overlay
- TS and JSX files **compiled** to JS on the fly

Production build

- You should **build** your app for production
 - Run `npm run build`
- **Compiles** and **bundles** all files
- **Minifies** JavaScript, and performs several **optimizations**
 - Pre-generates and caches everything it can
- As a result, the app is much **faster** in production

Production build

- Production build is **generated** in the **.next** directory
 - Only pure JS files: no TypeScript, no JSX
- Contains **server/**, **static/**, **cache/**, etc.
- Run the **production** application via **npm start**

Next.js production Dockerfile (basic)

```
FROM node:20-alpine

WORKDIR /app

COPY . .

RUN npm install

RUN npx prisma generate

RUN npm run build

EXPOSE 3000

ENV NODE_ENV=production

CMD npm start
```

Note: Use `.dockerignore` to exclude unnecessary files (e.g., `node_modules`)

Next.js production Dockerfile (optimized)

```
FROM node:20-alpine AS builder

WORKDIR /app

COPY package*.json ./
RUN npm install

COPY . .
RUN npx prisma generate

RUN npm run build

FROM node:20-alpine AS runner
WORKDIR /app

COPY --from=builder /app/.next ./.next
COPY --from=builder /app/public ./public
COPY --from=builder /app/package.json ./

RUN npm install --only=production

EXPOSE 3000
ENV NODE_ENV=production

CMD npm start
```


Webserver

- It's time to install a **webserver**
 - Examples: Nginx, Apache
- Listens on ports 80, 443, etc.
- Serves **multiple** web applications on the **same** computer
- Has many **security** features

Deploy with Nginx

- Create your config file at `/etc/nginx/sites-available/<project_name>`
- Make a **symbolic link** to that file at `/etc/nginx/sites-enabled/`
- **Restart Nginx!**

```
server {  
    listen 80;  
    server_name csc309.xyz www.csc309.xyz;  
  
    location /_next/static/ {  
        alias /home/ubuntu/csc309_proj/.next/static/;  
    }  
  
    location /public/ {  
        alias /home/ubuntu/csc309_proj/public/;  
    }  
  
    location / {  
        include proxy_params;  
        proxy_pass http://localhost:3000/;  
    }  
}
```

Static files

- Static files are **file/directory access** granted to the webserver
- Including static JS, CSS, and HTML files (generated at build), as well as images, fonts, etc.
 - Should be served by the **webserver** itself!
 - Webserver offers better **security** and **performance**
- Could be **uploaded** to **CDNs** for even faster retrieval

Additional steps

- You might need to check **permissions** as well
- It needs to read your static **files** and iterate your **directories**
 - Read/execute access to directories of your static files (including parent directories)
 - Read access to all static files

A Next.js Docker compose

- Volumes
 - Database
 - Static files storage
- Services (containers)
 - Database
 - Migration runner
 - Backend code (production build)
 - Webserver

Vercel

Visit <https://vercel.com>

- The **creator** of Next.js
- Has an incredibly **straightforward** deployment system
- Simply create an account, connect your repo, and **that's it!**
- It will build the application and host it on its own servers
 - **Automatic deployment** per push to the main branch
 - Provides HTTPS, scaling, and various optimizations


Vercel

- A **serverless** platform
- **Only** works for Next.js projects
 - As opposed to the VM-based approach
- Much **easier** for **simple** deployments, but much less **control** over the environment
- For example: cannot host a **database** with the application
 - Does not come with **persistent** storage
 - Should use a cloud-provided database

Questions?

DevOps

Visit <https://aws.amazon.com/devops/what-is-devops>

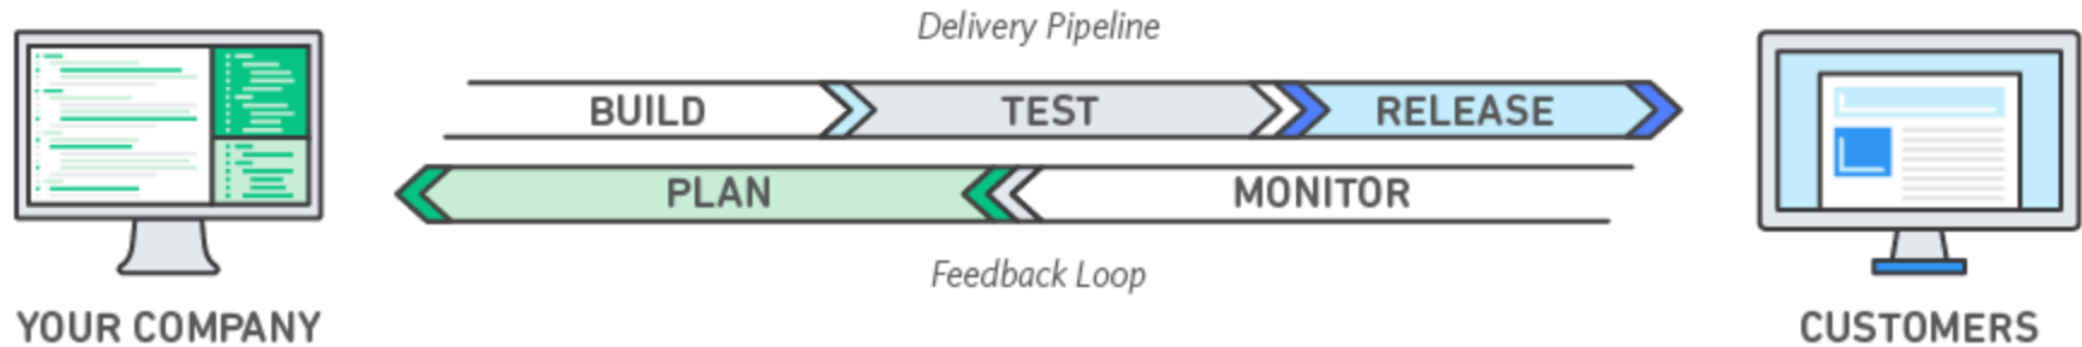

DevOps


- A set of principles and practices
- Continuous delivery
- Automated build and deployment

Auto DevOps

- Github and Gitlab support **auto DevOps**
- Once you push, a **pipeline** starts
 - Test
 - Build
 - Deploy
- Also called **CI/CD** (continuous integration & continuous delivery)

Auto DevOps

- Github/Gitlab can run all CI/CD processes through a **docker container**
- If everything is fine, the **docker images** will be your application!
- Can be **pushed** to a registry and pulled in the server

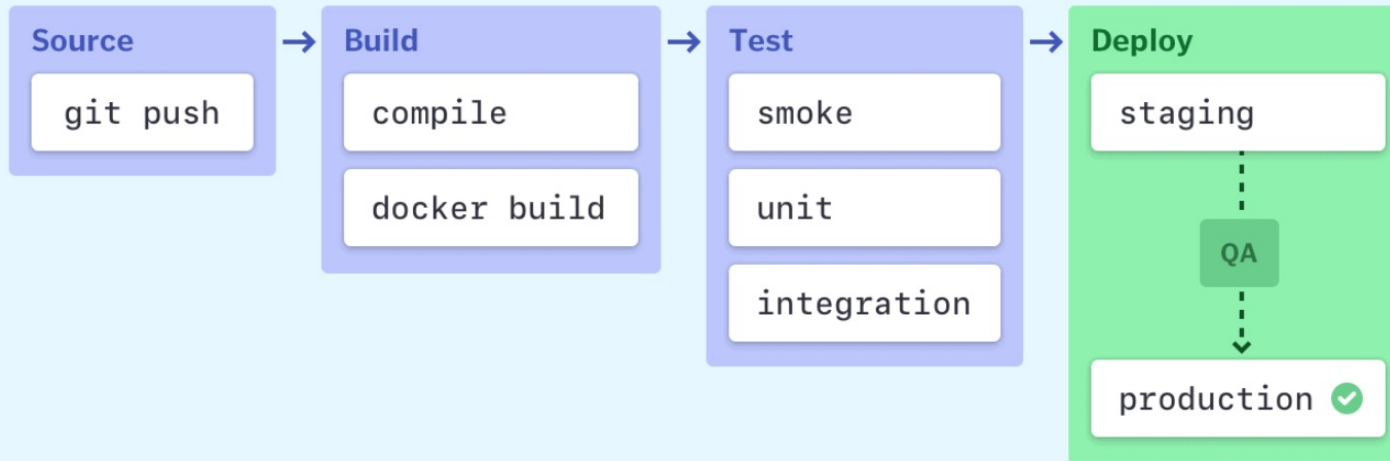

Source: <https://semaphoreci.com/blog/cicd-pipeline>

Example gitlab-ci.yml

```
deploy-staging:
  only:
    - develop
  when: manual
  script:
    - rsync -r ./ $TARGET_DIR
    - source $PY_ENV_PATH
    - cd $TARGET_DIR
    - pip install --upgrade -r requirements/$PIP_FILE.txt
    - python src/manage.py compilemessages
    - python src/manage.py collectstatic --noinput
    - python src/manage.py migrate --noinput
    - python create_env_file.py -o
    - sudo systemctl restart uwsgi
```

This course...

- A journey through the world of world wide web!
 - It was a long one, wasn't it?
- It's evolving at the speed of light!
 - Many of these things can go obsolete in 5 years!!
 - New technologies and innovations arrive!
- Hope you've had a fun time :)

